

IP20 SELV                                           

Standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62384

Acc. to 50172: 24 V LED control gear suitable for central battery systems

Overload protection

Automatic shutdown of the LED control gear if the maximum output current is exceeded. Automatic restart if the output current is below the limit.

No-load operation

The LED control gear is not damaged in the no-load operation. The max. output voltage (see page 1) can be obtained during no-load operation.

Over temperature protection

12 V:

Automatic shutdown of the LED control gear if the temperature limit is exceeded. Automatic restart if the temperature falls below the limit.

24 V:

Automatic power reduction of the LED control gear if the temperature limit is exceeded. Automatic restart to nominal mode if the temperature falls below the limit.

Glow wire test according to EN 60695-2-11

850 °C passed.


Maximum loading of automatic circuit breakers

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current	
Installation Ø	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	I _{max}	time
LCU 100/12 E020	6	8	12	14	3	5	6	7	81 A	0.18 ms
LCU 100/24 E020	6	8	10	12	3	5	5	6	98 A	0.14 ms


Harmonic distortion in the mains supply (at 230V/50Hz and full load) in %

Type	THD	3	5	7	9	11
LCU 100/12 E020	11	11	2	2	2	1
LCU 100/24 E020	6	4	1	1	1	1


LCU 100/12 E020 – Efficiency versus load

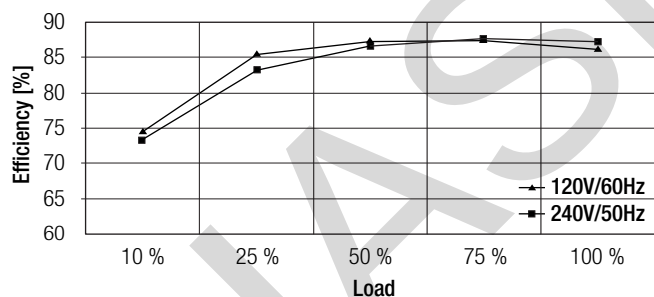


LCU 100/12 E020 – PF value versus load

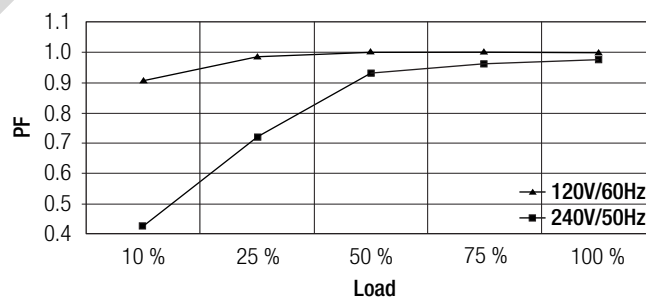


LCU 100/24 E020 – Efficiency versus load

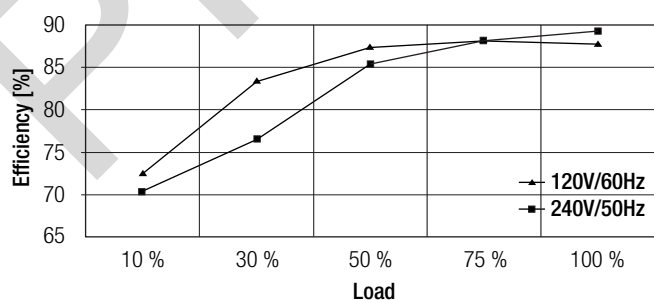

LCU 100/24 E020 – PF value versus load

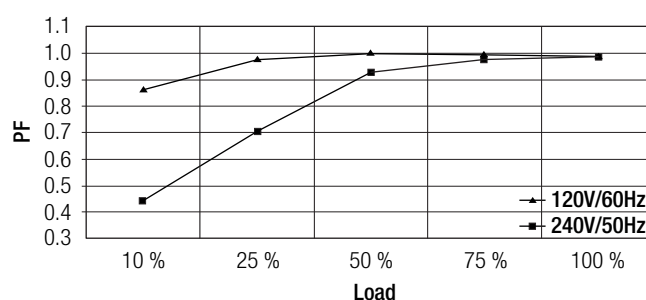

Wiring diagram

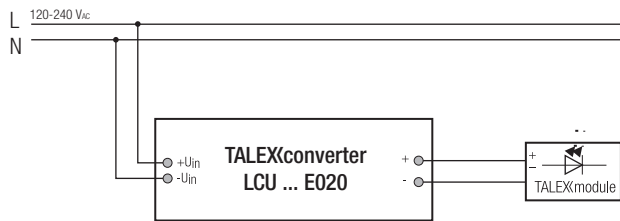

Installation instructions

The switching of LEDs on secondary side is not permitted.
A proper functioning of the LCU in combination with third party dimming devices (e.g. PWM) cannot be guaranteed.

Please note that LCU 100 complies with protection class II so special measures are needed if it is to be installed in protection class I applications / luminaires.

Please note the requirements set out in the document LED_Betriebsgeraete_installationshinweis.pdf (<http://www.tridonic.com/com/de/technische-doku.asp>).

Isolation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an isolation test with 500 V_{DC} for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal.

The isolation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V_{AC} (or 1.414 x 1500 V_{DC}). To avoid damage to the electronic devices this test must not be conducted.

Additional information

Additional technical information at www.tridonic.com → Technical Data

Guarantee conditions at www.tridonic.com → Services

No warranty if device was opened.

Wiring type and cross section

The wiring can be in stranded wires with ferrules or solid. For perfect function of the screw terminals the strip length should be 7.5–8.5 mm for the terminal.

Max. torque at the clamping screw: 0.5 Nm

The maximum secondary cable length at the terminals is 2 m. The LED wiring should be kept as short as possible to ensure good EMC.

Input / Output terminal

PRI and SEC:

