



#### Module SLE G7 9mm 800 / 2,600lm ADV

Modules SLE advanced

#### Product description

- For spotlights and downlights
- For operating with SELV Driver
- Excellent thermal management by COB technology
- Uniform radiation with Dam&Fill technology
- Integrated LED module
- Cooling required
- Flexible operating modes
- 4,000 K module COI approved acc. to AS/NZS1680.2.5:1997
- Long lifetime: 55,000 hours
- 5 years guarantee

#### Optical properties

- Colour temperatures 2,700 K, 3,100 K, 3,500 K and 4,100 K
- Useful luminous flux 3,007 lm at  $I_{rated}$  and  $t_p = 25^\circ\text{C}$
- Efficacy of the LED module 126 lm/W at  $I_{rated}$  and  $t_p = 25^\circ\text{C}$
- High colour rendering index CRI > 90
- Small colour tolerance MacAdam 3

#### Mechanical properties

- Module dimension LES09
- Fixing holes for M3 screws

#### System solution

- Combine Tridonic's LED modules and dimmable drivers to achieve an outstanding system efficacy (configuration possible via <https://setbuilder.tridonic.com/>)



LES09



**Standards**, page 5

**Colour temperatures and tolerances**, page 10




## Module SLE G7 9mm 800 / 2,600lm ADV

Modules SLE advanced

### Technical data

Beam characteristic	115°
Ambient temperature range	-30 ... +80 °C
tp rated	65 °C
tc <sup>①</sup>	105 °C
Irated for 800 lm	350 mA
Irated for 2,600 lm	700 mA
I <sub>max</sub> for 800 lm <sup>①</sup>	500 mA
I <sub>max</sub> for 2,600 lm <sup>①</sup>	1,050 mA
Max. permissible LF current ripple for 800 lm	600 mA
Max. permissible LF current ripple for 2,600 lm	1,250 mA
Max. permissible peak current for 800 lm	700 mA / max. 8 ms
Max. permissible peak current for 2,600 lm	1,400 mA / max. 8 ms
Max. working voltage for insulation SELV <sup>®</sup>	< 60 V
Electrical strength	0.5 kV
CTI of the printed circuit board	≥ 600
ESD classification	Severity level 4
Risk group (IEC 62471) for 800 lm at I <sub>max</sub>	RG2 (E <sub>thr</sub> = 1662 lx, RG1 at d ≥ 585 mm)
Risk group (IEC 62471) for 800 lm at ≤ 490 mA	RG1
Risk group (IEC 62471) for 2,600 lm at I <sub>max</sub>	RG2 (E <sub>thr</sub> = 1615 lx, RG1 at d ≥ 913 mm)
Risk group (IEC 62471) for 2,600 lm at ≤ 470 mA	RG1
Type of protection	IP00
Lumen maintenance L70B50	55,000 h
Guarantee	5 years

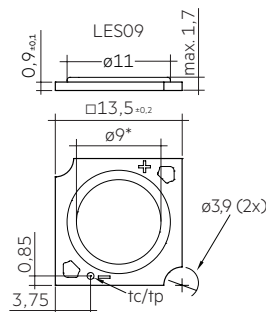

Dimensions in mm, \*optical LES

### Ordering data

Type	Article number	Colour temperature	Colour rendering index CRI	Packaging	Weight per pc.
<b>SLE G7 09mm – Without housing</b>					
<b>SLE G7 09mm 800lm 930 R ADV</b>	<b>28003428</b>	3,100 K	> 90	20 pc(s).	0.001 kg
<b>SLE G7 09mm 800lm 935 R ADV</b>	<b>28003429</b>	3,500 K	> 90	20 pc(s).	0.001 kg
<b>SLE G7 09mm 800lm 940 R ADV</b>	<b>28003430</b>	4,100 K	> 90	20 pc(s).	0.001 kg
<b>SLE G7 09mm 2600lm 927 R ADV</b>	<b>28004146</b>	2,700 K	> 90	20 pc(s).	0.001 kg
<b>SLE G7 09mm 2600lm 930 R ADV</b>	<b>28003431</b>	3,100 K	> 90	20 pc(s).	0.001 kg
<b>SLE G7 09mm 2600lm 935 R ADV</b>	<b>28003432</b>	3,500 K	> 90	20 pc(s).	0.001 kg
<b>SLE G7 09mm 2600lm 940 R ADV</b>	<b>28003433</b>	4,100 K	> 90	20 pc(s).	0.001 kg

## Specific technical data

Type	Photo-metric code	Useful luminous flux at tp = 25 °C <sup>③</sup>	Expected luminous flux at tp rated <sup>④</sup>	Typ. forward current	Min. forward voltage at tp = 65 °C	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C <sup>⑤</sup>	Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Colour rendering index CRI
<b>SLE 09mm 800lm – Operating mode at 250 mA</b>										
<b>SLE G7 09mm 800lm 930 R ADV</b>	930/359	–	1,080 lm	250 mA	32.9 V	38.5 V	–	–	123 lm/W	> 90
<b>SLE G7 09mm 800lm 935 R ADV</b>	935/359	–	1,107 lm	250 mA	32.9 V	38.5 V	–	–	125 lm/W	> 90
<b>SLE G7 09mm 800lm 940 R ADV</b>	940/359	–	1,032 lm	250 mA	32.9 V	38.5 V	–	–	117 lm/W	> 90
<b>SLE 09mm 800lm – Operating mode at 350 mA</b>										
<b>SLE G7 09mm 800lm 930 R ADV</b>	930/359	1,615 lm	1,486 lm	350 mA	34.4 V	40.0 V	13.1 W	123 lm/W	115 lm/W	> 90
<b>SLE G7 09mm 800lm 935 R ADV</b>	935/359	1,655 lm	1,515 lm	350 mA	34.4 V	40.0 V	13.1 W	126 lm/W	117 lm/W	> 90
<b>SLE G7 09mm 800lm 940 R ADV</b>	940/359	1,539 lm	1,419 lm	350 mA	34.4 V	40.0 V	13.1 W	117 lm/W	109 lm/W	> 90
<b>SLE 09mm 800lm – Operating mode at 450 mA</b>										
<b>SLE G7 09mm 800lm 930 R ADV</b>	930/359	–	1,853 lm	450 mA	35.4 V	41.0 V	–	–	108 lm/W	> 90
<b>SLE G7 09mm 800lm 935 R ADV</b>	935/359	–	1,894 lm	450 mA	35.4 V	41.0 V	–	–	110 lm/W	> 90
<b>SLE G7 09mm 800lm 940 R ADV</b>	940/359	–	1,769 lm	450 mA	35.4 V	41.0 V	–	–	103 lm/W	> 90
<b>SLE 09mm 2600lm – Operating mode at 500 mA</b>										
<b>SLE G7 09mm 2600lm 927 R ADV</b>	927/359	–	2,009 lm	500 mA	32.4 V	38.2 V	–	–	113 lm/W	> 90
<b>SLE G7 09mm 2600lm 930 R ADV</b>	930/359	–	2,046 lm	500 mA	32.4 V	38.2 V	–	–	115 lm/W	> 90
<b>SLE G7 09mm 2600lm 935 R ADV</b>	935/359	–	2,177 lm	500 mA	32.4 V	38.2 V	–	–	123 lm/W	> 90
<b>SLE G7 09mm 2600lm 940 R ADV</b>	940/359	–	2,017 lm	500 mA	32.4 V	38.2 V	–	–	114 lm/W	> 90
<b>SLE 09mm 2600lm – Operating mode at 700 mA</b>										
<b>SLE G7 09mm 2600lm 927 R ADV</b>	927/359	2,960 lm	2,723 lm	700 mA	33.9 V	40.5 V	26.3 W	113 lm/W	105 lm/W	> 90
<b>SLE G7 09mm 2600lm 930 R ADV</b>	930/359	3,050 lm	2,804 lm	700 mA	33.9 V	40.5 V	26.3 W	116 lm/W	108 lm/W	> 90
<b>SLE G7 09mm 2600lm 935 R ADV</b>	935/359	3,245 lm	2,985 lm	700 mA	33.9 V	40.5 V	26.3 W	123 lm/W	115 lm/W	> 90
<b>SLE G7 09mm 2600lm 940 R ADV</b>	940/359	3,007 lm	2,759 lm	700 mA	33.9 V	40.5 V	26.3 W	114 lm/W	107 lm/W	> 90
<b>SLE 09mm 2600lm – Operating mode at 900 mA</b>										
<b>SLE G7 09mm 2600lm 927 R ADV</b>	927/359	–	3,512 lm	900 mA	35.4 V	41.5 V	–	–	98 lm/W	> 90
<b>SLE G7 09mm 2600lm 930 R ADV</b>	930/359	–	3,512 lm	900 mA	35.4 V	41.5 V	–	–	101 lm/W	> 90
<b>SLE G7 09mm 2600lm 935 R ADV</b>	935/359	–	3,724 lm	900 mA	35.4 V	41.5 V	–	–	108 lm/W	> 90
<b>SLE G7 09mm 2600lm 940 R ADV</b>	940/359	–	3,456 lm	900 mA	35.4 V	41.5 V	–	–	101 lm/W	> 90

<sup>①</sup> See derating curves in data sheet section 2.3.

<sup>②</sup> The detailed explanation, see data sheet section 3.1.

<sup>③</sup> Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.


<sup>④</sup> Tolerance of expected light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %. Based on calculation.

<sup>⑤</sup> Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.


## SLE G7 housing for LES09

### Product description

- Housing for LES09
- Diameter: 35 mm
- Material: Lexan Resin 943
- M3 screws with flat head, max. head diameter of 6 mm and max. torque for fixing is 0.5 Nm

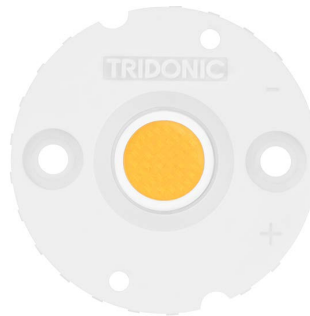

LES09

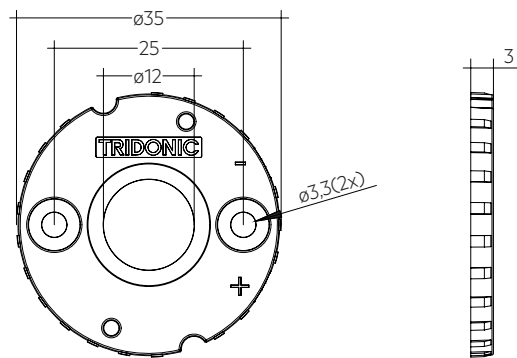

SLE G7 HOUSING LES09

### Ordering data

Type	Article number	Packaging bag	Weight per pc.
SLE G7 HOUSING LES 09	28003024	500 pc(s).	0.002 kg

## 1. Standards

EN 62031  
 EN 62471  
 IEC 62717  
 IEC 61000-4-2  
 UL 8750 (for CLASS2 circuits and dry locations)

### 1.2 Photometric code

Key for photometric code, e. g. 830 / 359

1 <sup>st</sup> digit	2 <sup>nd</sup> + 3 <sup>rd</sup> digit	4 <sup>th</sup> digit	5 <sup>th</sup> digit	6 <sup>th</sup> digit
Code	CRI	Colour temperature in Kelvin x 100	MacAdam after 25% of the lifetime (max.6000h)	Luminous flux after 25% of the lifetime (max.6000h)
7	70 – 79	MacAdam initial	(max.6000h)	Code
8	80 – 89			Luminous flux
9	≥90			
				7 ≥ 70 %
				8 ≥ 80 %
				9 ≥ 90 %

### 1.3 Energy classification

Type	Colour temperature	Forward current	Energy classification	Energy consumption
SLE G7 09mm 800lm 930 R ADV	3,100 K	350 mA	E	14 kWh / 1,000 h
SLE G7 09mm 800lm 935 R ADV	3,500 K	350 mA	E	14 kWh / 1,000 h
SLE G7 09mm 800lm 940 R ADV	4,100 K	350 mA	F	14 kWh / 1,000 h
SLE G7 09mm 2600lm 927 R ADV	2,700 K	700 mA	F	27 kWh / 1,000 h
SLE G7 09mm 2600lm 930 R ADV	3,100 K	700 mA	F	27 kWh / 1,000 h
SLE G7 09mm 2600lm 935 R ADV	3,500 K	700 mA	F	27 kWh / 1,000 h
SLE G7 09mm 2600lm 940 R ADV	4,100 K	700 mA	F	27 kWh / 1,000 h

Energy label and further information at [www.tridonic.com](http://www.tridonic.com) in the certificates tab of the corresponding product page and at the EPREL data base <https://eprel.ec.europa.eu/>

## 2. Thermal details

### 2.1 tp point, ambient temperature and lifetime


The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For SLE G7 a tp temperature of 85 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tp point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

To check the tc / tp temperature, the temperature sensor has to be mounted on the PCB at the marked position as stated in the drawing.



### 2.2 Storage and humidity


storage temperature	-30 ... +80 °C
---------------------	----------------

Operation only in non condensing environment.


Humidity during processing of the module should be between 0 to 85 %.

### 2.3 Derating curves

#### SLE G7 09mm 800lm 9xx ADV

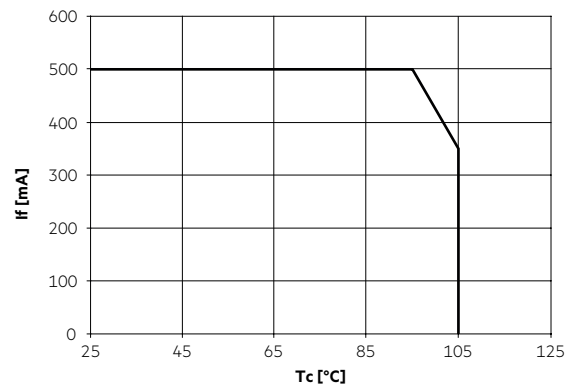

#### SLE G7 09mm 2600lm 9xx ADV

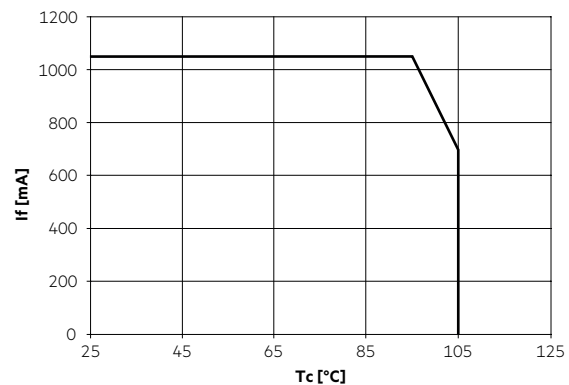

### 2.4 Thermal design and heat sink

The rated life of LED products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the SLE G7 will be greatly reduced or the SLE G7 may be destroyed.

## 2.5 Heat sink values

SLE G7 09mm 800lm 9xx ADV

t <sub>a</sub>	t <sub>p</sub>	Operating current	R <sub>th, hs-a</sub>
25°C	65°C	250 mA	4,80 K/W
35°C	65°C	250 mA	3,60 K/W
45°C	65°C	250 mA	2,40 K/W
25°C	65°C	350 mA	3,10 K/W
35°C	65°C	350 mA	2,30 K/W
45°C	65°C	350 mA	1,50 K/W
25°C	65°C	450 mA	2,30 K/W
35°C	65°C	450 mA	1,70 K/W
45°C	65°C	450 mA	1,10 K/W

SLE G7 09mm 2600lm 9xx ADV

t <sub>a</sub>	t <sub>p</sub>	Operating current	R <sub>th, hs-a</sub>
25°C	85°C	500 mA	2,20 K/W
35°C	85°C	500 mA	1,70 K/W
45°C	85°C	500 mA	1,10 K/W
25°C	85°C	700 mA	1,50 K/W
35°C	85°C	700 mA	1,10 K/W
45°C	85°C	700 mA	0,80 K/W
25°C	85°C	900 mA	1,10 K/W
35°C	85°C	900 mA	0,90 K/W
45°C	85°C	900 mA	0,60 K/W

### Notes

The actual cooling can differ because of the material, the structural shape, outside influences and the installation situation. A thermal connection between SLE G7 and heat sink with heat-conducting paste or heat conducting adhesive film is absolutely necessary.

Additionally the SLE G7 has to be fixed on the heat sink with M3 screws to optimise the thermal connection.

Use of thermal interface material with thermal conductivity of  $\lambda > 1 \text{ W/mK}$  and layer thickness of interface material with max. 50  $\mu\text{m}$  or a similar interface material where the quotient of layer thickness and thermal conductivity  $b < 50 \mu\text{mmK/W}$ .

## 3. Installation / wiring

### 3.1 Electrical supply/choice of LED driver

SLE G7 from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED driver which complies with the relevant standards. The use of LED drivers from Tridonic in combination with SLE G7 guarantees the necessary protection for safe and reliable operation.

If a LED driver other than Tridonic is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection



SLE G7 must be supplied by a constant current LED driver. Operation with a constant voltage LED driver will lead to an irreversible damage of the module. Wrong polarity can damage the SLE G7.



SLE G7 must not be operated with nonSELV LED driver.




SLE G7 are basic insulated up to 60 V SELV against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the LED driver (also against earth) is above 60 V SELV, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction.


At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.

### 3.2 Wiring

#### Wiring without housing

LES09

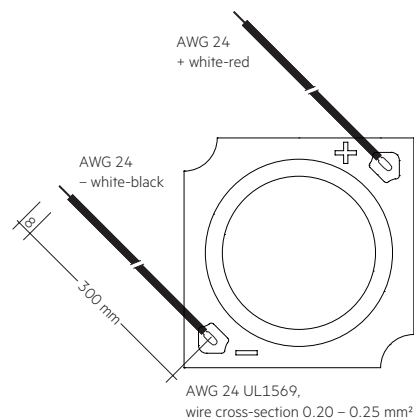

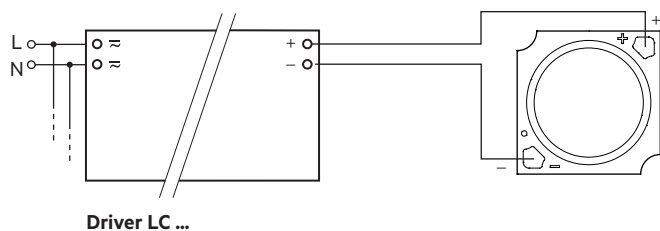**Wiring example****3.4 Mounting instruction**

SLE G7 from Tridonic which have to be installed on a heat sink have to be connected with heat-conducting paste or heat conducting adhesive film and fixed with M3 screws.

The fixing/cooling surface must be cleaned by removing all dirt, dust and grease before installing the LED modules.

None of the components of the SLE G7 (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.



Max. torque for fixing: 0.3Nm (LES9)

The LED modules are mounted with 2 screws per module. In order not to damage the modules only rounded head screws and an additional plastic flat washer (notice working temperature) or rounded head screw with collar (ISO 7380-2) with head diameter  $\geq 6.9$  mm must be used for LED modules without housing.

For further information please refer to the brochure entitled "Technical Design-In-Guide SLE GEN7".



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.

Avoid corrosive atmosphere during usage and storage.

**3.5 EOS/ESD safety guidelines**

The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice.

For further information for EOS/ESD safety guidelines and the ESD classification please refer to the brochure entitled <http://www.tridonic.com/esd-protection>.

## 4. Lifetime

### 4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value. L70 means that the LED module will give 70 % of its initial luminous flux. This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules. The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value.

In addition the percentage of failed modules (fatal failure) is characterized by the C value.

The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

### 4.2 Lumen maintenance

Lifetime declarations are informative and represent no warranty claim. Preliminary calculated lifetime data until LM80 test reports are available

#### SLE G7 09mm 800lm ADV

Operating current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
250 mA	65 °C	50,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h
	85 °C	50,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h
	105 °C	26,000 h	37,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h
350 mA	65 °C	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h
	85 °C	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h
	105 °C	14,000 h	20,000 h	31,000 h	50,000 h	51,000 h	>55,000 h
450 mA	65 °C	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h
	85 °C	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h

#### SLE G7 09mm 2600lm ADV

Operating current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
500 mA	65 °C	50,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h
	85 °C	50,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h
	105 °C	26,000 h	37,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h
700 mA	65 °C	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h
	85 °C	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h
	105 °C	14,000 h	20,000 h	31,000 h	50,000 h	51,000 h	>55,000 h
900 mA	65 °C	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h
	85 °C	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h	>55,000 h



## 5. Electrical values

### 5.1 Declaration of electrical parameters

Irated ... Nominal operating current the module is designed for.


I<sub>max</sub> ... Max. permissible continuous operating current incl. The tolerances of the LED driver.

Max. permissible LF current ripple ... Max. output current of the LED driver incl. Tolerances and LF current ripple must not exceed this value.


Max. permissible peak current ... The max. output peak current of the LED driver must not exceed this value.

### 5.2 Typ. forward voltage vs. forward current


SLE G7 09mm 800lm 9xx ADV

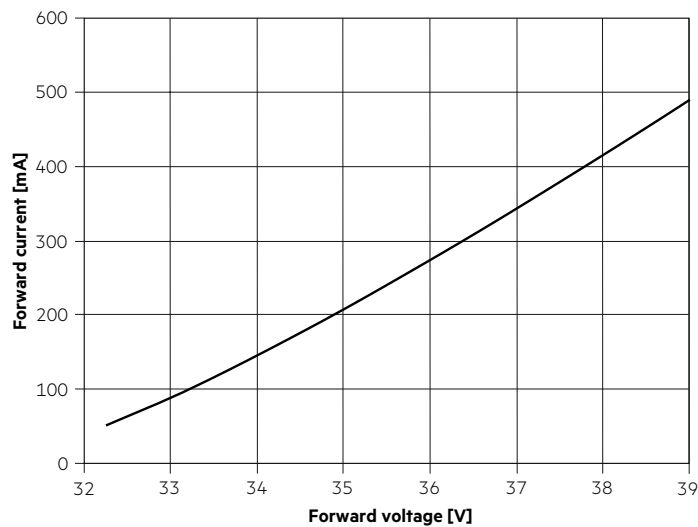

SLE G7 09mm 2600lm 9xx ADV

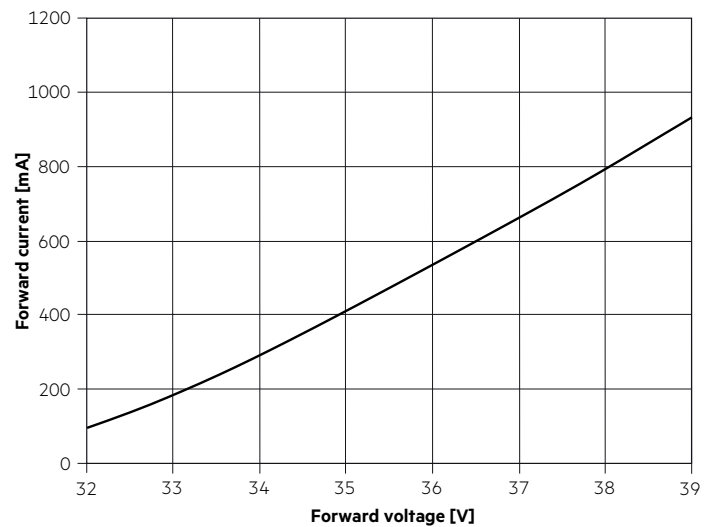

### 5.3 Forward voltage vs. tp temperature

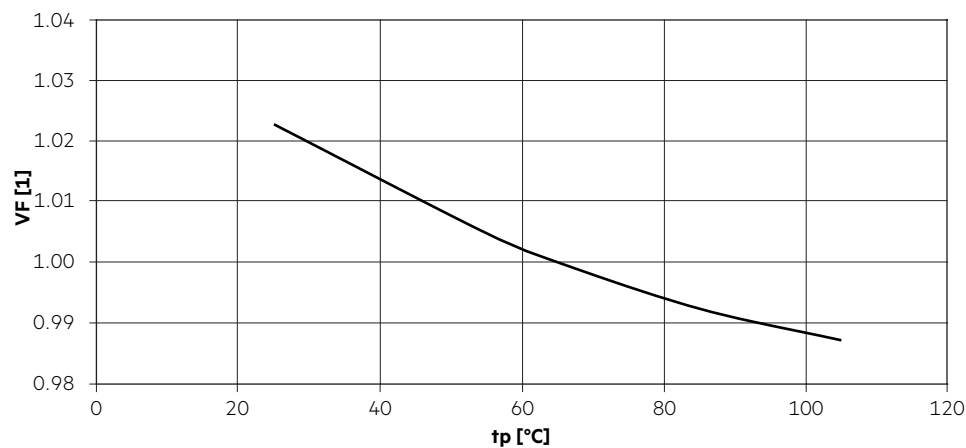

The diagrams based on statistic values.  
The real values can be different.

## 6. Photometric characteristics


### 6.1 Coordinates and tolerances according to CIE 1931 and colour rendering

The specified colour coordinates are measured integral after a settling time of 100 ms. The current impuls depends on the module type. The ambient temperature of the measurement is  $t_a = 25^\circ\text{C}$ . The measurement tolerance of the colour coordinates are  $\pm 0.005$ .


Module type	Current impulse
SLE G7 09mm 800lm 9xx ADV	350 mA
SLE G7 09mm 2600lm 9xx ADV	700 mA

#### 2,700 K – CRI90

	x0	y0
Centre	0.4599	0.4106

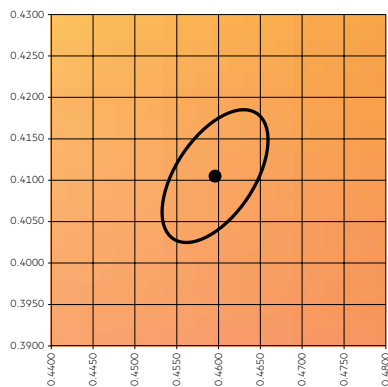


MacAdam ellipse: 3SDCM

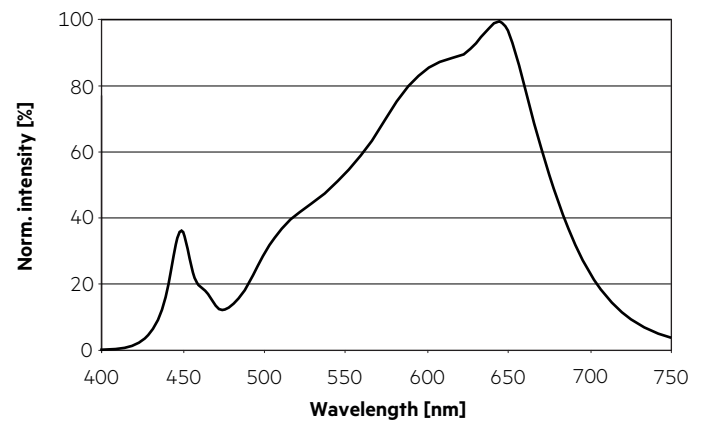


TM30		CRI	
Rf	Rg	Ra	R9
90	100	92	60

#### Colour vector graphic

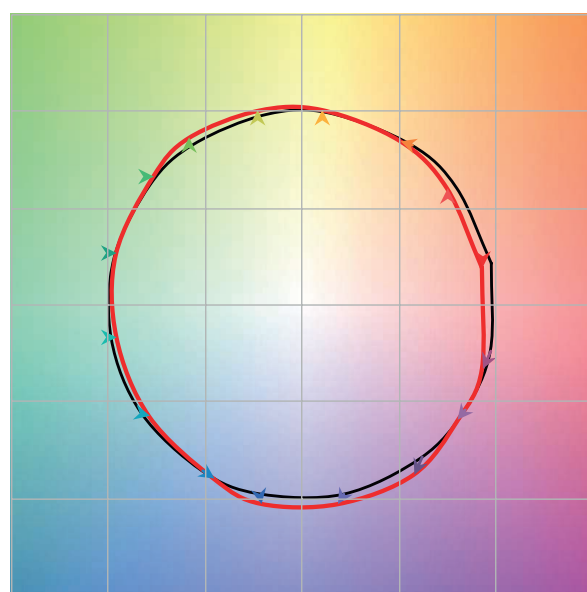


— Reference source  
— Test source

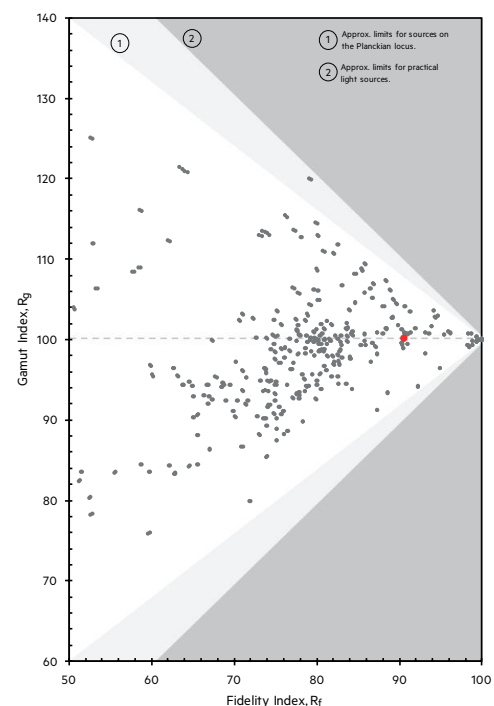


### 3,100 K – CRI90

	x0	y0
Centre	0.4300	0.4016


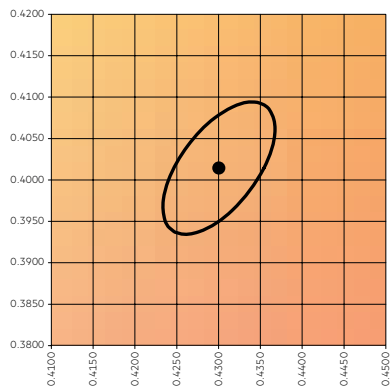


MacAdam ellipse: 3SDCM

TM30		CRI	
Rf	Rg	Ra	R9
90	98	92	59

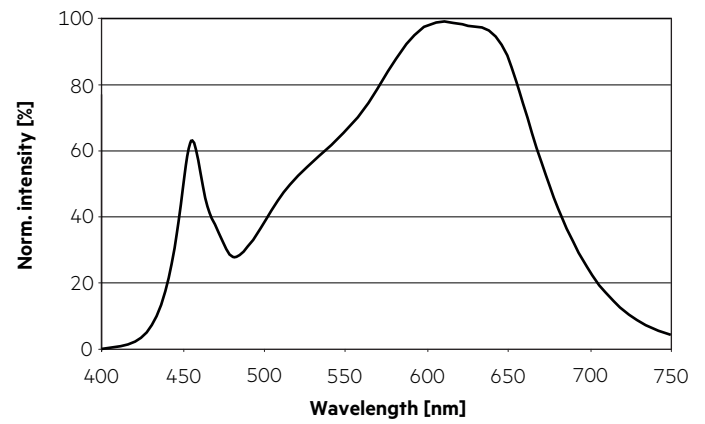


### Colour vector graphic

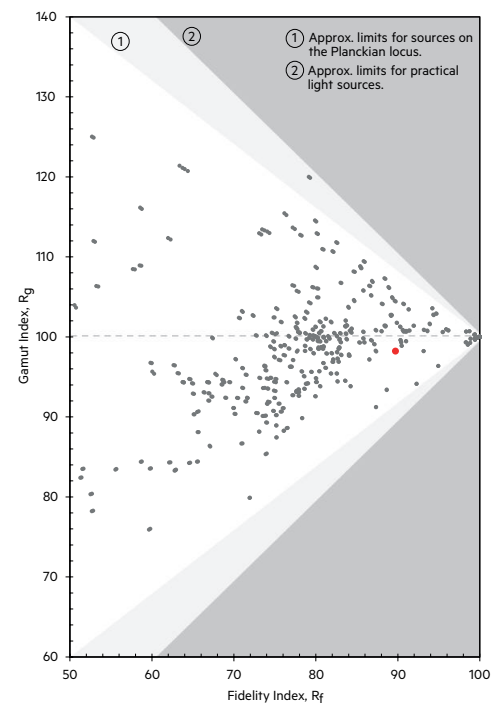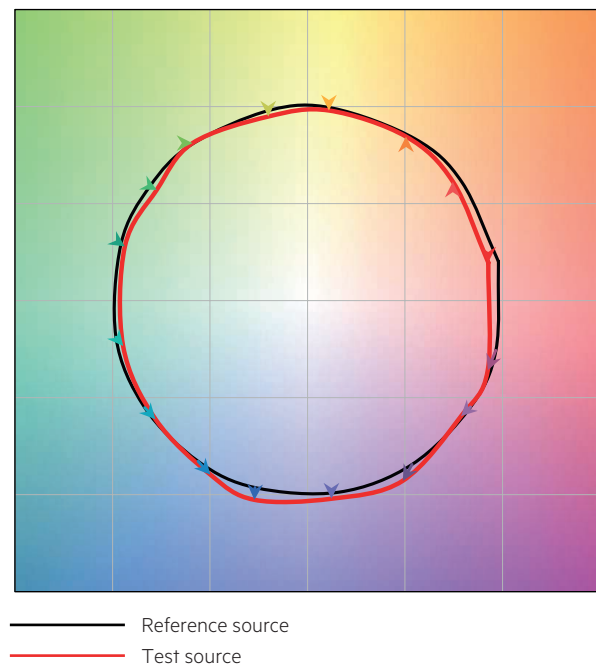


### 3,500 K – CRI90

	x0	y0
Centre	0.4053	0.3907

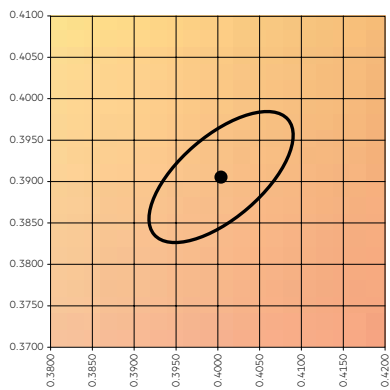


MacAdam ellipse: 3SDCM


TM30		CRI	
Rf	Rg	Ra	R9
90	98	94	70

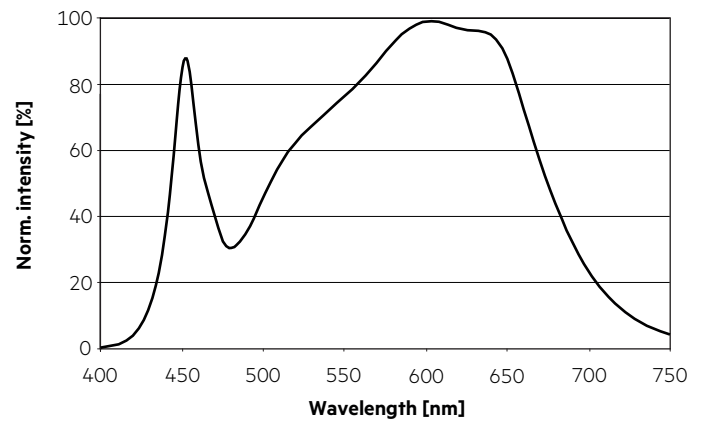

### Colour vector graphic

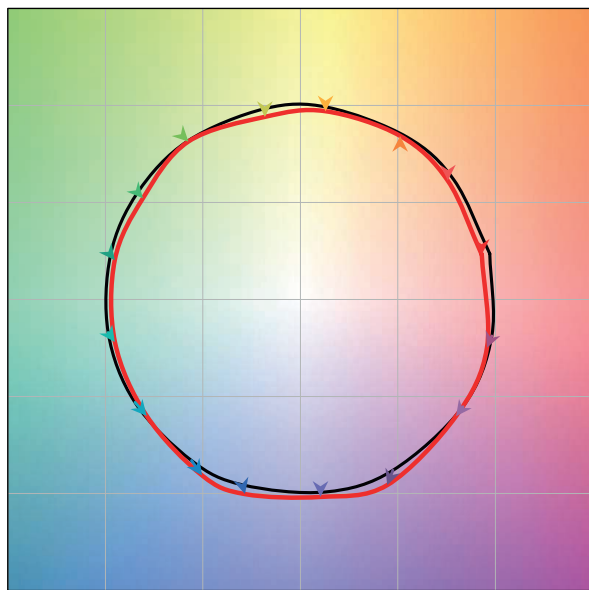


— Reference source  
— Test source

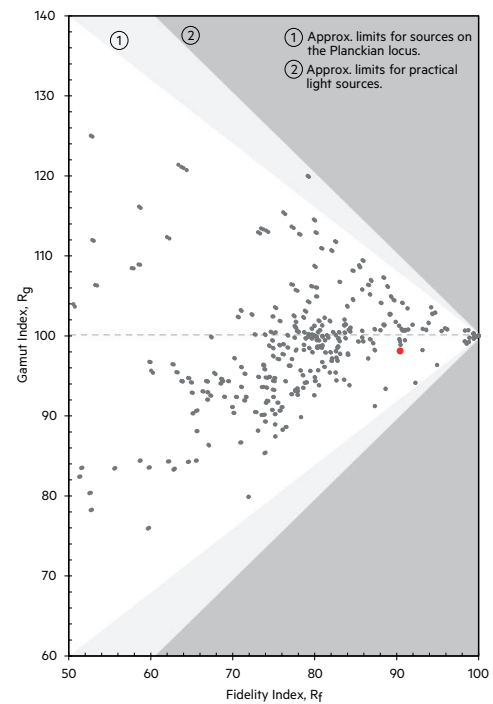


#### 4,100 K – CRI90

	x0	y0
Centre	0.3761	0.3740

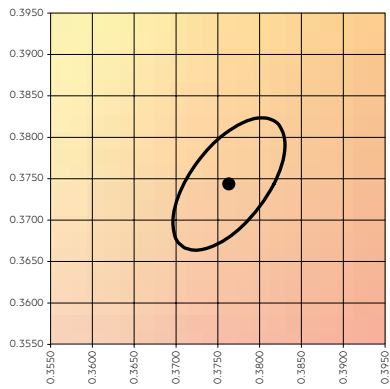


MacAdam ellipse: 3SDCM


TM30		CRI	
Rf	Rg	Ra	R9
90	100	91	70

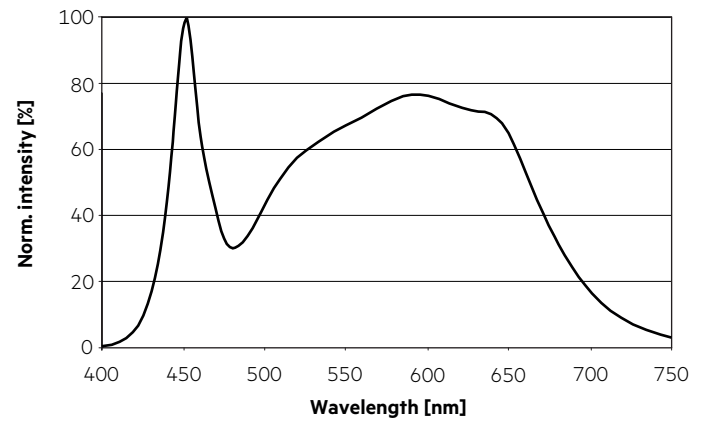

#### Colour vector graphic

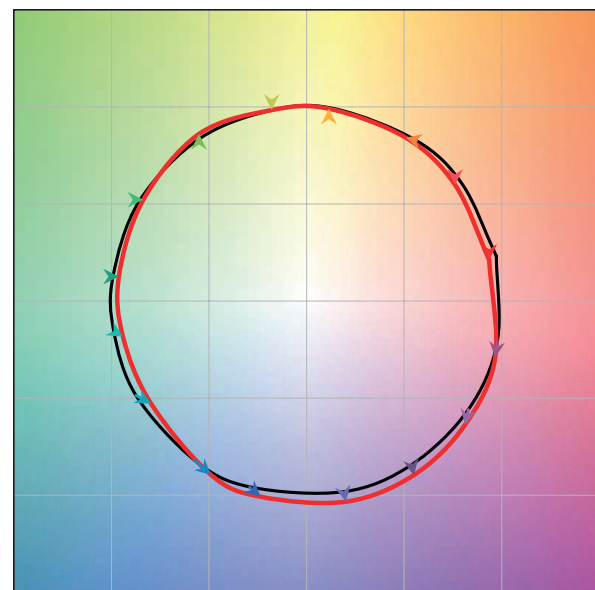


— Reference source  
— Test source

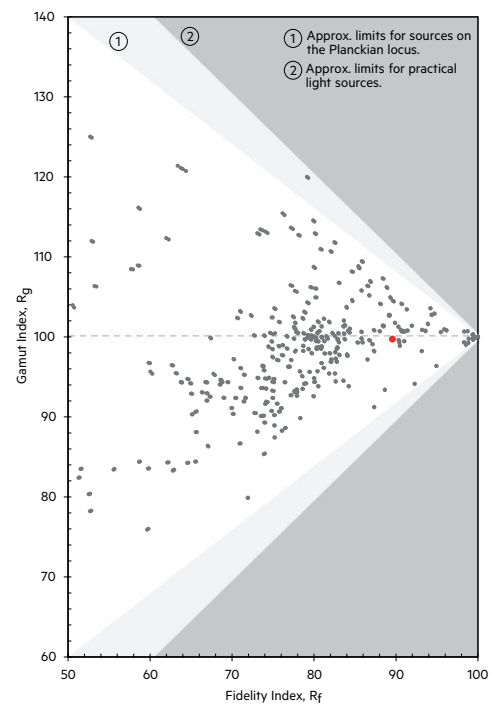


## 6.2 Light distribution

The optical design of the SLE product line ensures optimum homogeneity for the light distribution.

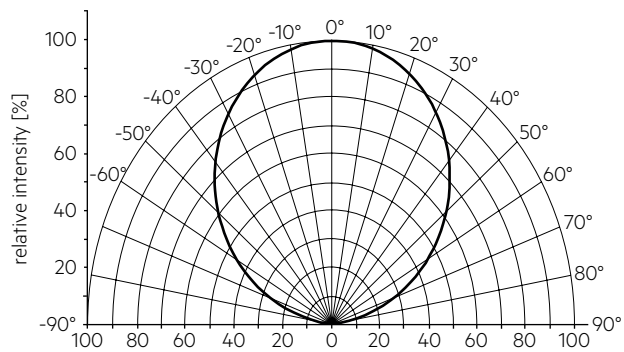


## 6.3 Relative luminous flux vs. tp temperature

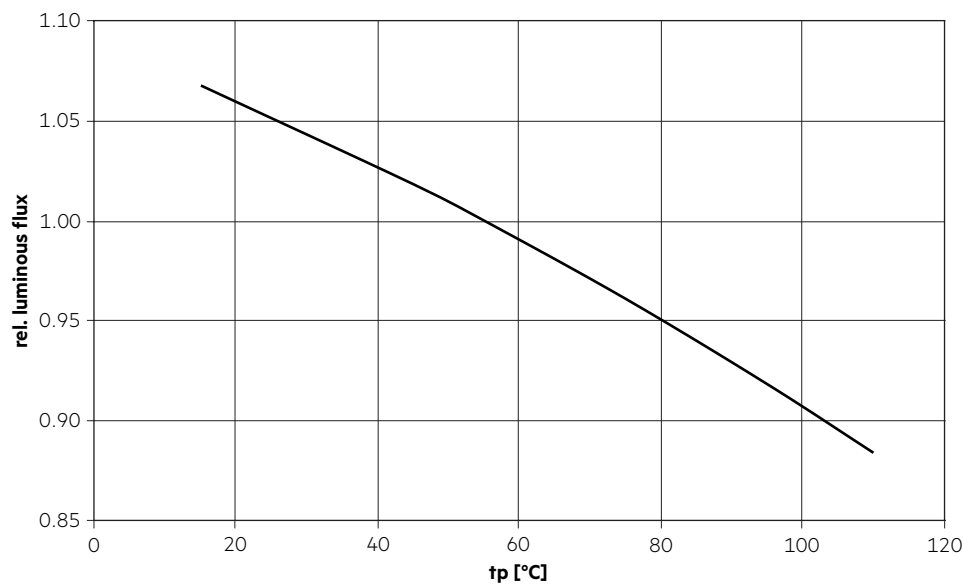


## 6.4 Relative luminous flux vs. operating current

SLE G7 09mm 800lm 9xx ADV

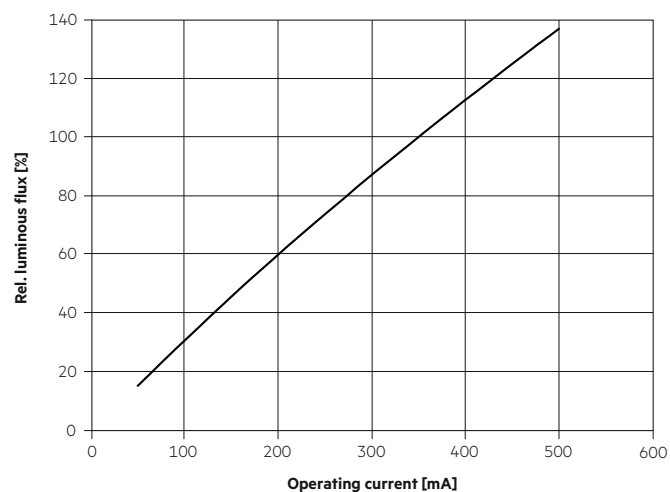

SLE G7 09mm 2600lm 9xx ADV

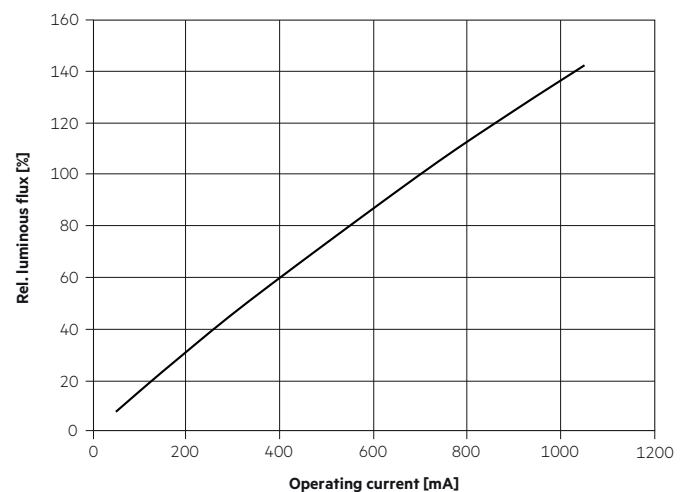

## 7. Miscellaneous

### 7.1 Additional information

Additional technical information at [www.tridonic.com](http://www.tridonic.com) → Technical Data

Guarantee conditions at [www.tridonic.com](http://www.tridonic.com) → Services

Lifetime declarations are informative and represent no warranty claim.

Colour rendering information are typical values and represent no warranty claim.