



Module LLE 24x1120 / 24x1400mm HV ADV6

Modules LLE advanced

Product description

- Ideal for linear and panel lights
- 2 terminals for serial wiring
- Perfectly uniform light, even if several LED modules are used together in a line
- Push terminals for quick and simple wiring of LED module to LED module
- Option backside terminal
- Broad portfolio from extruded lenses and covers available
- HE ... High Efficiency, NM ... Nominal Mode, HO ... High Output
- Long lifetime: 72,000 hours
- 5 years guarantee (conditions at www.tridonic.com)

Optical properties

- Colour temperatures 3,000 K, 3,500 K and 4,000 K
- Useful luminous flux 10,124 lm at Irated and tp = 25 °C
- Efficacy of the LED module 205 lm/W at Irated and tp = 25 °C
- High colour rendering index CRI > 80
- High colour consistency (MacAdam 3)®
- Small luminous flux tolerances

Mechanical properties

- Module dimension 24 x 1,120 mm and 24 x 1,400 mm (ZHAGA compliant)
- Simple installation (e.g. clips or screws)

System solution

- Combine Tridonic`s LED modules and dimmable drivers to achieve an outstanding system efficacy (configuration possible via <https://setbuilder.tridonic.com/>)



Standards, page 15

Colour temperatures and tolerances, page 20



LLE 24x1120mm 2600lm HV ADV6



LLE 24x1400mm 3250lm HV ADV6



LLE 24x1120mm 4800lm HV ADV6



LLE 24x1400mm 6000lm HV ADV6



LLE 24x1120mm 8000lm HV ADV6



LLE 24x1400mm 10000lm HV ADV6




Module LLE 24x1120 / 24x1400mm HV ADV6

Modules LLE advanced


Technical data

Colour consistency ⁵⁾	3 SDCM
ESD classification	severity level 2
Classification acc. to IEC 62031	Built-in
Type of protection	IP00
Lumen maintenance L70B50	72,000 h
Guarantee	5 year(s)


^① Integral measurement over the complete module.

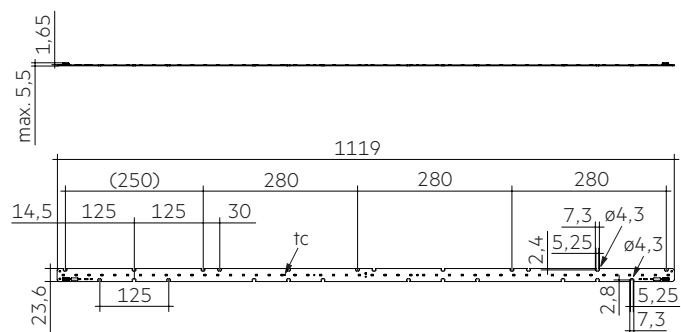


LLE 24x1120mm 2600lm HV ADV6

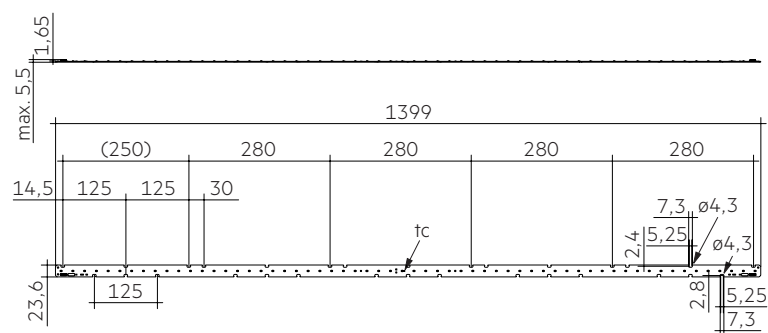

LLE 24x1400mm 3250lm HV ADV6

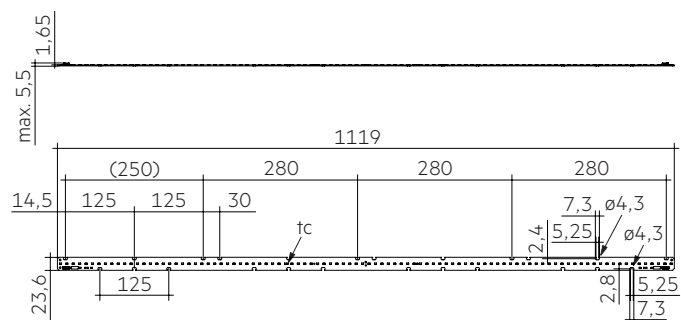


LLE 24x1120mm 4800lm HV ADV6

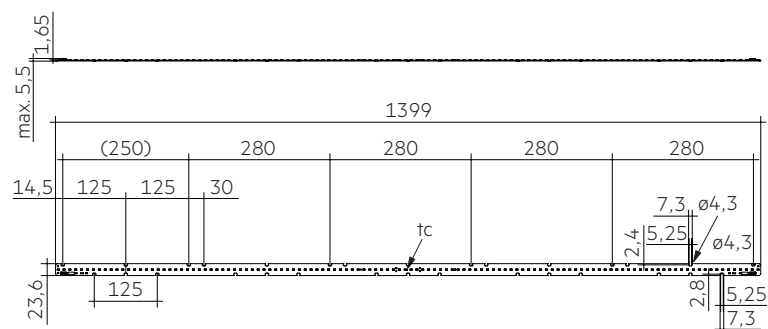

LLE 24x1400mm 6000lm HV ADV6

Modules LLE advanced



Type	Article number	Packaging carton	Weight per pc.
LLE 24x1120mm 2600lm 830 HV ADV6	28004837	20 pc(s).	0.091 kg
LLE 24x1120mm 2600lm 835 HV ADV6	28004839	20 pc(s).	0.091 kg
LLE 24x1120mm 2600lm 840 HV ADV6	28004841	20 pc(s).	0.091 kg
LLE 24x1400mm 3250lm 830 HV ADV6	28004851	20 pc(s).	0.115 kg
LLE 24x1400mm 3250lm 835 HV ADV6	28004852	20 pc(s).	0.116 kg
LLE 24x1400mm 3250lm 840 HV ADV6	28004853	20 pc(s).	0.116 kg
LLE 24x1120mm 4800lm 830 HV ADV6	28004884	20 pc(s).	0.091 kg
LLE 24x1120mm 4800lm 835 HV ADV6	28004885	20 pc(s).	0.091 kg
LLE 24x1120mm 4800lm 840 HV ADV6	28004886	20 pc(s).	0.091 kg
LLE 24x1400mm 6000lm 830 HV ADV6	28004889	20 pc(s).	0.116 kg
LLE 24x1400mm 6000lm 835 HV ADV6	28004890	20 pc(s).	0.116 kg
LLE 24x1400mm 6000lm 840 HV ADV6	28004891	20 pc(s).	0.116 kg
LLE 24x1120mm 8000lm 830 HV ADV6	28004908	20 pc(s).	0.091 kg
LLE 24x1120mm 8000lm 840 HV ADV6	28004909	20 pc(s).	0.091 kg
LLE 24x1400mm 10000lm 830 HV ADV6	28004910	20 pc(s).	0.116 kg
LLE 24x1400mm 10000lm 840 HV ADV6	28004911	20 pc(s).	0.116 kg

Photometric data

Type	Colour temperature	Photometric Code ^①	Useful luminous flux at tp = 25 °C ^②	Luminous flux at tp rated ^③			Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Beam characteristic	Colour rendering index CRI
				Min.	Typ.	Max.				
Operating mode HE										
LLE 24x1120mm 2600lm 830 HV ADV6	3,000 K	830/359	–	749 lm	832 lm	916 lm	–	197 lm/W	120°	> 80
LLE 24x1120mm 2600lm 835 HV ADV6	3,500 K	835/359	–	774 lm	860 lm	947 lm	–	204 lm/W	120°	> 80
LLE 24x1120mm 2600lm 840 HV ADV6	4,000 K	840/359	–	794 lm	882 lm	971 lm	–	209 lm/W	120°	> 80
LLE 24x1400mm 3250lm 830 HV ADV6	3,000 K	830/359	–	936 lm	1,040 lm	1,145 lm	–	197 lm/W	120°	> 80
LLE 24x1400mm 3250lm 835 HV ADV6	3,500 K	835/359	–	968 lm	1,075 lm	1,184 lm	–	204 lm/W	120°	> 80
LLE 24x1400mm 3250lm 840 HV ADV6	4,000 K	840/359	–	993 lm	1,103 lm	1,214 lm	–	209 lm/W	120°	> 80
LLE 24x1120mm 4800lm 830 HV ADV6	3,000 K	830/359	–	1,498 lm	1,664 lm	1,831 lm	–	197 lm/W	120°	> 80
LLE 24x1120mm 4800lm 835 HV ADV6	3,500 K	835/359	–	1,549 lm	1,721 lm	1,894 lm	–	204 lm/W	120°	> 80
LLE 24x1120mm 4800lm 840 HV ADV6	4,000 K	840/359	–	1,589 lm	1,765 lm	1,942 lm	–	209 lm/W	120°	> 80
LLE 24x1400mm 6000lm 830 HV ADV6	3,000 K	830/359	–	1,872 lm	2,081 lm	2,289 lm	–	197 lm/W	120°	> 80
LLE 24x1400mm 6000lm 835 HV ADV6	3,500 K	835/359	–	1,936 lm	2,151 lm	2,367 lm	–	204 lm/W	120°	> 80
LLE 24x1400mm 6000lm 840 HV ADV6	4,000 K	840/359	–	1,986 lm	2,207 lm	2,428 lm	–	209 lm/W	120°	> 80
LLE 24x1120mm 8000lm 830 HV ADV6	3,000 K	830/359	–	2,247 lm	2,497 lm	2,747 lm	–	197 lm/W	120°	> 80
LLE 24x1120mm 8000lm 840 HV ADV6	4,000 K	840/359	–	2,383 lm	2,648 lm	2,914 lm	–	209 lm/W	120°	> 80
LLE 24x1400mm 10000lm 830 HV ADV6	3,000 K	830/359	–	2,809 lm	3,121 lm	3,434 lm	–	197 lm/W	120°	> 80
LLE 24x1400mm 10000lm 840 HV ADV6	4,000 K	840/359	–	2,979 lm	3,310 lm	3,642 lm	–	209 lm/W	120°	> 80
Operating mode NM										
LLE 24x1120mm 2600lm 830 HV ADV6	3,000 K	830/359	2,340 lm	2,021 lm	2,245 lm	2,471 lm	193 lm/W	187 lm/W	120°	> 80
LLE 24x1120mm 2600lm 835 HV ADV6	3,500 K	835/359	2,420 lm	2,090 lm	2,322 lm	2,555 lm	199 lm/W	193 lm/W	120°	> 80
LLE 24x1120mm 2600lm 840 HV ADV6	4,000 K	840/359	2,482 lm	2,143 lm	2,382 lm	2,620 lm	205 lm/W	198 lm/W	120°	> 80
LLE 24x1400mm 3250lm 830 HV ADV6	3,000 K	830/359	2,925 lm	2,526 lm	2,807 lm	3,088 lm	193 lm/W	187 lm/W	120°	> 80
LLE 24x1400mm 3250lm 835 HV ADV6	3,500 K	835/359	3,024 lm	2,613 lm	2,902 lm	3,193 lm	199 lm/W	193 lm/W	120°	> 80
LLE 24x1400mm 3250lm 840 HV ADV6	4,000 K	840/359	3,102 lm	2,679 lm	2,977 lm	3,275 lm	205 lm/W	198 lm/W	120°	> 80
LLE 24x1120mm 4800lm 830 HV ADV6	3,000 K	830/359	4,680 lm	4,042 lm	4,491 lm	4,941 lm	193 lm/W	187 lm/W	120°	> 80
LLE 24x1120mm 4800lm 835 HV ADV6	3,500 K	835/359	4,839 lm	4,180 lm	4,644 lm	5,109 lm	199 lm/W	193 lm/W	120°	> 80
LLE 24x1120mm 4800lm 840 HV ADV6	4,000 K	840/359	4,964 lm	4,287 lm	4,764 lm	5,241 lm	205 lm/W	198 lm/W	120°	> 80
LLE 24x1400mm 6000lm 830 HV ADV6	3,000 K	830/359	5,850 lm	5,053 lm	5,614 lm	6,176 lm	193 lm/W	187 lm/W	120°	> 80
LLE 24x1400mm 6000lm 835 HV ADV6	3,500 K	835/359	6,049 lm	5,225 lm	5,805 lm	6,386 lm	199 lm/W	193 lm/W	120°	> 80
LLE 24x1400mm 6000lm 840 HV ADV6	4,000 K	840/359	6,205 lm	5,359 lm	5,955 lm	6,551 lm	205 lm/W	198 lm/W	120°	> 80
LLE 24x1120mm 8000lm 830 HV ADV6	3,000 K	830/359	7,637 lm	6,597 lm	7,330 lm	8,063 lm	192 lm/W	186 lm/W	120°	> 80
LLE 24x1120mm 8000lm 840 HV ADV6	4,000 K	840/359	1,985 lm	6,997 lm	7,774 lm	8,552 lm	203 lm/W	197 lm/W	120°	> 80
LLE 24x1400mm 10000lm 830 HV ADV6	3,000 K	830/359	9,546 lm	8,246 lm	9,162 lm	10,078 lm	192 lm/W	186 lm/W	120°	> 80
LLE 24x1400mm 10000lm 840 HV ADV6	4,000 K	840/359	10,124 lm	8,746 lm	9,717 lm	10,689 lm	203 lm/W	197 lm/W	120°	> 80

^① The detailed explanation, see data sheet section 1.1.

^② Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

^③ Measurement uncertainty ± 10 %. Based on calculation.

Photometric data

Type	Colour temperature	Photometric Code ^①	Useful luminous flux at tp = 25 °C ^②	Luminous flux at tp rated ^③			Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Beam characteristic	Colour rendering index CRI
				Min.	Typ.	Max.				
Operating mode HO										
LLE 24x1120mm 2600lm 830 HV ADV6	3,000 K	830/359	–	4,799 lm	5,332 lm	5,865 lm	–	164 lm/W	120°	> 80
LLE 24x1120mm 2600lm 835 HV ADV6	3,500 K	835/359	–	4,962 lm	5,513 lm	6,065 lm	–	170 lm/W	120°	> 80
LLE 24x1120mm 2600lm 840 HV ADV6	4,000 K	840/359	–	5,090 lm	5,655 lm	6,221 lm	–	174 lm/W	120°	> 80
LLE 24x1400mm 3250lm 830 HV ADV6	3,000 K	830/359	–	5,998 lm	6,665 lm	7,331 lm	–	164 lm/W	120°	> 80
LLE 24x1400mm 3250lm 835 HV ADV6	3,500 K	835/359	–	6,202 lm	6,891 lm	7,581 lm	–	170 lm/W	120°	> 80
LLE 24x1400mm 3250lm 840 HV ADV6	4,000 K	840/359	–	6,362 lm	7,069 lm	7,776 lm	–	174 lm/W	120°	> 80
LLE 24x1120mm 4800lm 830 HV ADV6	3,000 K	830/359	–	9,597 lm	10,664 lm	11,730 lm	–	164 lm/W	120°	> 80
LLE 24x1120mm 4800lm 835 HV ADV6	3,500 K	835/359	–	9,924 lm	11,026 lm	12,129 lm	–	170 lm/W	120°	> 80
LLE 24x1120mm 4800lm 840 HV ADV6	4,000 K	840/359	–	10,179 lm	11,310 lm	12,441 lm	–	174 lm/W	120°	> 80
LLE 24x1400mm 6000lm 830 HV ADV6	3,000 K	830/359	–	11,997 lm	13,330 lm	14,663 lm	–	164 lm/W	120°	> 80
LLE 24x1400mm 6000lm 835 HV ADV6	3,500 K	835/359	–	12,405 lm	13,783 lm	15,161 lm	–	170 lm/W	120°	> 80
LLE 24x1400mm 6000lm 840 HV ADV6	4,000 K	840/359	–	12,724 lm	14,138 lm	15,552 lm	–	174 lm/W	120°	> 80
LLE 24x1120mm 8000lm 830 HV ADV6	3,000 K	830/359	–	12,596 lm	13,996 lm	15,396 lm	–	170 lm/W	120°	> 80
LLE 24x1120mm 8000lm 840 HV ADV6	4,000 K	840/359	–	13,360 lm	14,844 lm	16,329 lm	–	180 lm/W	120°	> 80
LLE 24x1400mm 10000lm 830 HV ADV6	3,000 K	830/359	–	15,745 lm	17,495 lm	19,245 lm	–	170 lm/W	120°	> 80
LLE 24x1400mm 10000lm 840 HV ADV6	4,000 K	840/359	–	16,700 lm	18,556 lm	20,412 lm	–	180 lm/W	120°	> 80

^① The detailed explanation, see data sheet section 1.1.

^② Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

^③ Measurement uncertainty ± 10 %. Based on calculation.

Electrical data

Type	Forward current	Min. forward voltage at tp rated	Typ. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C ^①	Energy classification	Energy consumption	Type of light source
Operating mode HE								
LLE 24x1120mm 2600lm 830 HV ADV6	100 mA	40.3 V	42.2 V	43.9 V	–	–	–	–
LLE 24x1120mm 2600lm 835 HV ADV6	100 mA	40.3 V	42.2 V	43.9 V	–	–	–	–
LLE 24x1120mm 2600lm 840 HV ADV6	100 mA	40.3 V	42.2 V	43.9 V	–	–	–	–
LLE 24x1400mm 3250lm 830 HV ADV6	100 mA	50.4 V	52.8 V	54.9 V	–	–	–	–
LLE 24x1400mm 3250lm 835 HV ADV6	100 mA	50.4 V	52.8 V	54.9 V	–	–	–	–
LLE 24x1400mm 3250lm 840 HV ADV6	100 mA	50.4 V	52.8 V	54.9 V	–	–	–	–
LLE 24x1120mm 4800lm 830 HV ADV6	100 mA	80.7 V	84.5 V	87.8 V	–	–	–	–
LLE 24x1120mm 4800lm 835 HV ADV6	100 mA	80.7 V	84.5 V	87.8 V	–	–	–	–
LLE 24x1120mm 4800lm 840 HV ADV6	100 mA	80.7 V	84.5 V	87.8 V	–	–	–	–
LLE 24x1400mm 6000lm 830 HV ADV6	100 mA	100.8 V	105.6 V	109.8 V	–	–	–	–
LLE 24x1400mm 6000lm 835 HV ADV6	100 mA	100.8 V	105.6 V	109.8 V	–	–	–	–
LLE 24x1400mm 6000lm 840 HV ADV6	100 mA	100.8 V	105.6 V	109.8 V	–	–	–	–
LLE 24x1120mm 8000lm 830 HV ADV6	100 mA	121.0 V	126.7 V	131.7 V	–	–	–	–
LLE 24x1120mm 8000lm 840 HV ADV6	100 mA	121.0 V	126.7 V	131.7 V	–	–	–	–
LLE 24x1400mm 10000lm 830 HV ADV6	100 mA	151.2 V	158.4 V	164.7 V	–	–	–	–
LLE 24x1400mm 10000lm 840 HV ADV6	100 mA	151.2 V	158.4 V	164.7 V	–	–	–	–
Operating mode NM								
LLE 24x1120mm 2600lm 830 HV ADV6	275 mA	41.8 V	43.7 V	45.4 V	12.1 W	C	13 kWh / 1,000 h	non-directional
LLE 24x1120mm 2600lm 835 HV ADV6	275 mA	41.8 V	43.7 V	45.4 V	12.1 W	B	13 kWh / 1,000 h	non-directional
LLE 24x1120mm 2600lm 840 HV ADV6	275 mA	41.8 V	43.7 V	45.4 V	12.1 W	B	13 kWh / 1,000 h	non-directional
LLE 24x1400mm 3250lm 830 HV ADV6	275 mA	52.3 V	54.6 V	56.8 V	15.2 W	C	16 kWh / 1,000 h	non-directional
LLE 24x1400mm 3250lm 835 HV ADV6	275 mA	52.3 V	54.6 V	56.8 V	15.2 W	C	16 kWh / 1,000 h	non-directional
LLE 24x1400mm 3250lm 840 HV ADV6	275 mA	52.3 V	54.6 V	56.8 V	15.2 W	B	16 kWh / 1,000 h	non-directional
LLE 24x1120mm 4800lm 830 HV ADV6	275 mA	83.6 V	87.4 V	90.8 V	24.3 W	C	25 kWh / 1,000 h	non-directional
LLE 24x1120mm 4800lm 835 HV ADV6	275 mA	83.6 V	87.4 V	90.8 V	24.3 W	C	25 kWh / 1,000 h	non-directional
LLE 24x1120mm 4800lm 840 HV ADV6	275 mA	83.6 V	87.4 V	90.8 V	24.3 W	B	25 kWh / 1,000 h	non-directional
LLE 24x1400mm 6000lm 830 HV ADV6	275 mA	104.5 V	109.3 V	113.5 V	30.3 W	C	31 kWh / 1,000 h	non-directional
LLE 24x1400mm 6000lm 835 HV ADV6	275 mA	104.5 V	109.3 V	113.5 V	30.3 W	C	31 kWh / 1,000 h	non-directional
LLE 24x1400mm 6000lm 840 HV ADV6	275 mA	104.5 V	109.3 V	113.5 V	30.3 W	B	31 kWh / 1,000 h	non-directional
LLE 24x1120mm 8000lm 830 HV ADV6	300 mA	125.9 V	131.7 V	136.7 V	39.9 W	C	40 kWh / 1,000 h	non-directional
LLE 24x1120mm 8000lm 840 HV ADV6	300 mA	125.9 V	131.7 V	136.7 V	39.9 W	B	40 kWh / 1,000 h	non-directional
LLE 24x1400mm 10000lm 830 HV ADV6	300 mA	157.4 V	164.6 V	170.9 V	49.8 W	C	50 kWh / 1,000 h	non-directional
LLE 24x1400mm 10000lm 840 HV ADV6	300 mA	157.4 V	164.6 V	170.9 V	49.8 W	B	50 kWh / 1,000 h	non-directional

^① Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.

Electrical data

Type	Forward current	Min. forward voltage at tp rated	Typ. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C ^①	Energy classification	Energy consumption	Type of light source
Operating mode HO								
LLE 24x1120mm 2600lm 830 HV ADV6	700 mA	44.4 V	46.3 V	48.1 V	–	–	–	–
LLE 24x1120mm 2600lm 835 HV ADV6	700 mA	44.4 V	46.3 V	48.1 V	–	–	–	–
LLE 24x1120mm 2600lm 840 HV ADV6	700 mA	44.4 V	46.3 V	48.1 V	–	–	–	–
LLE 24x1400mm 3250lm 830 HV ADV6	700 mA	55.5 V	57.9 V	60.1 V	–	–	–	–
LLE 24x1400mm 3250lm 835 HV ADV6	700 mA	55.5 V	57.9 V	60.1 V	–	–	–	–
LLE 24x1400mm 3250lm 840 HV ADV6	700 mA	55.5 V	57.9 V	60.1 V	–	–	–	–
LLE 24x1120mm 4800lm 830 HV ADV6	700 mA	88.9 V	92.7 V	96.1 V	–	–	–	–
LLE 24x1120mm 4800lm 835 HV ADV6	700 mA	88.9 V	92.7 V	96.1 V	–	–	–	–
LLE 24x1120mm 4800lm 840 HV ADV6	700 mA	88.9 V	92.7 V	96.1 V	–	–	–	–
LLE 24x1400mm 6000lm 830 HV ADV6	700 mA	111.1 V	115.9 V	120.1 V	–	–	–	–
LLE 24x1400mm 6000lm 835 HV ADV6	700 mA	111.1 V	115.9 V	120.1 V	–	–	–	–
LLE 24x1400mm 6000lm 840 HV ADV6	700 mA	111.1 V	115.9 V	120.1 V	–	–	–	–
LLE 24x1120mm 8000lm 830 HV ADV6	600 mA	131.7 V	137.4 V	142.5 V	–	–	–	–
LLE 24x1120mm 8000lm 840 HV ADV6	600 mA	131.7 V	137.4 V	142.5 V	–	–	–	–
LLE 24x1400mm 10000lm 830 HV ADV6	600 mA	164.6 V	171.7 V	178.1 V	–	–	–	–
LLE 24x1400mm 10000lm 840 HV ADV6	600 mA	164.6 V	171.7 V	178.1 V	–	–	–	–

^① Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.


Specific technical data

Type	Irated	I _{max}	Max. permissible LF current ripple	Max. permissible peak current / max. pulse width	Max. working voltage for insulation ^①	Electrical strength	t _a	t _p rated	t _c
LLE 24x1120mm 2600lm 830 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1120mm 2600lm 835 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1120mm 2600lm 840 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1400mm 3250lm 830 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1400mm 3250lm 835 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1400mm 3250lm 840 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1120mm 4800lm 830 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1120mm 4800lm 835 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1120mm 4800lm 840 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1400mm 6000lm 830 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1400mm 6000lm 835 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1400mm 6000lm 840 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1120mm 8000lm 830 HV ADV6	300 mA	700 mA	800 mA	1,350 mA / 10 ms	350 V	1.70 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1120mm 8000lm 840 HV ADV6	300 mA	700 mA	800 mA	1,350 mA / 10 ms	350 V	1.70 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1400mm 10000lm 830 HV ADV6	300 mA	700 mA	800 mA	1,350 mA / 10 ms	350 V	1.70 kV	-40 ... +65 °C	50 °C	95 °C
LLE 24x1400mm 10000lm 840 HV ADV6	300 mA	700 mA	800 mA	1,350 mA / 10 ms	350 V	1.70 kV	-40 ... +65 °C	50 °C	95 °C

^① If mounted with M4 screws with 7 mm head diameter.

Product description

- LINEAR COVER for LLE 24
- Protection against direct touch for non-SELV applications
(recommendation: use all fixing points)
- Fast snap on mounting on to LLE 24 with clips or plastic washers
- High transmission: transparent 94 %, semi-transparent 87 %, diffuse 76 %
- Made of PMMA
- Tolerances: ± 1 mm for 597 mm length (ends finished),
+ 10 mm for 1,200 / 1,500 / 1,600 / 1,800 mm length (ends raw)

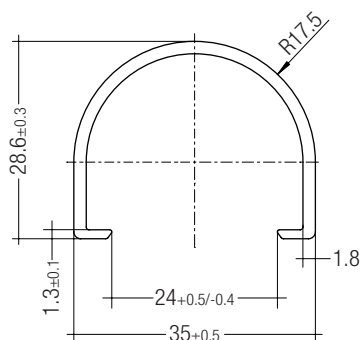

Ordering data

Type	Article number	Colour	Length	Packaging carton	Weight per pc.
LINEAR COVER SY Transparent 1600mm	28000338	Transparent	1,600 mm	12 pc(s).	0.272 kg
LINEAR COVER SY Frosted 1800mm	28000437	Semi-transparent	1,800 mm	12 pc(s).	0.308 kg
LINEAR COVER SY Frosted 1600mm	28000339	Semi-transparent	1,600 mm	12 pc(s).	0.272 kg
LINEAR COVER SY Frosted 1500mm	28000435	Semi-transparent	1,500 mm	12 pc(s).	0.244 kg
LINEAR COVER SY Frosted 1200mm	28000422	Semi-transparent	1,200 mm	12 pc(s).	0.205 kg
LINEAR COVER SY Frosted 597mm	28000340	Semi-transparent	597 mm	12 pc(s).	0.102 kg
LINEAR COVER SY Diffuse 1800mm	28000438	Diffuse	1,800 mm	12 pc(s).	0.308 kg
LINEAR COVER SY Diffuse 1600mm	28000341	Diffuse	1,600 mm	12 pc(s).	0.272 kg
LINEAR COVER SY Diffuse 1500mm	28000436	Diffuse	1,500 mm	12 pc(s).	0.257 kg
LINEAR COVER SY Diffuse 1200mm	28000434	Diffuse	1,200 mm	12 pc(s).	0.205 kg
LINEAR COVER SY Diffuse 597mm	28000342	Diffuse	597 mm	12 pc(s).	0.102 kg

Product description


- ENDCAP for LLE 24
- PUSH-FIX: Fast snap on mounting (sheet thickness 0.5 – 1.0 mm), for drilling hole 4 mm
- SCREW-FIX: Screw mounting with EJOT Delta PT WN 5451 30x8 (not included), tightening torque 0.7 Nm
- Made of Polycarbonat




ACL ENDCAP LLE24 PUSH-FIX



ACL ENDCAP LLE24 SCREW-FIX



ACL ENDCAP LLE24 PUSH-FIX

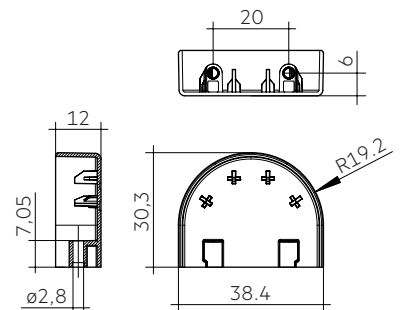

ACL ENDCAP LLE24 SCREW-FIX

Ordering data

Type	Article number	Colour	Packaging carton	Weight per pc.
ACL ENDCAP LLE24 PUSH-FIX	28001037	White	480 pc(s).	0.003 kg
ACL ENDCAP LLE24 SCREW-FIX	28002315	White	480 pc(s).	0.003 kg

Product description LINEAR LENS

- Linear lens for LLE 24
- Available with different beam characteristics
- Protection against direct touch for non-SELV applications (recommendation: use all fixing points)
- Fast snap on mounting on to LLE 24 with clips or plastic washers
- Recommendation: Fastening with screws and plastic washers, see 2.3 Heat sink specifications
- Linear lense made of PMMA
- Available lengths: 1,200, 1,500, 1,600 and 1,800 mm, Tolerance: + 10 mm (ends raw)
- Max. permissible temperature 80 °C
- Photometric data available on website

Product description Endcap

- ENDCAP for LINEAR LENS 24mm INTENSE, ASY and DASY
- Mounting by clipping in and screwing from below using screw EJOT Delta PT WN 5451 20x4, tightening torque 0.7 Nm
- Made of Polyamide UL94 V0



ACL LINEAR LENS 24mm 60°



ACL LINEAR LENS 24mm 90°



ACL LINEAR LENS 24mm INTENSE



ACL LINEAR LENS 24mm BATWING



ACL LINEAR LENS 24mm ASY




ACL LINEAR LENS 24mm DASY




ACL Endcap LENS 24mm PSF


ACL LENS 24mm

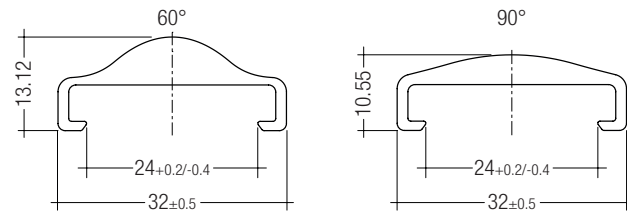


ACL LINEAR LENS 24mm 60° and 90°

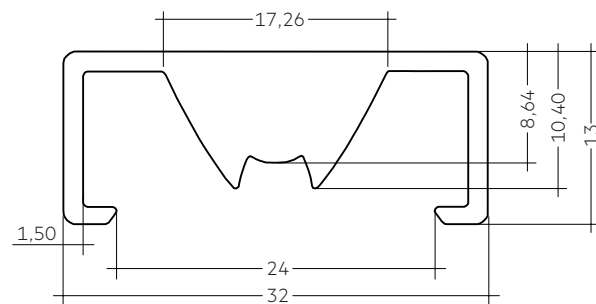


ACL LINEAR LENS 24mm INTENSE

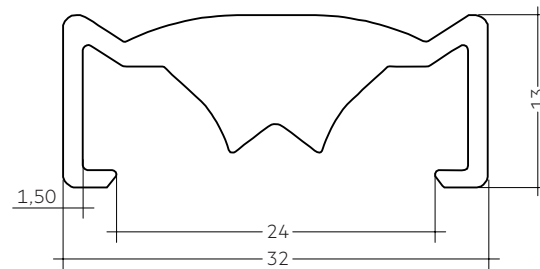

ACL LINEAR LENS 24mm BATWING

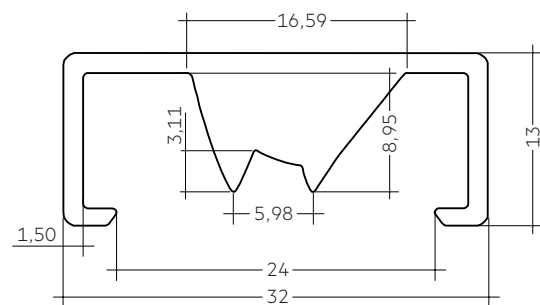


ACL LINEAR LENS 24mm ASY

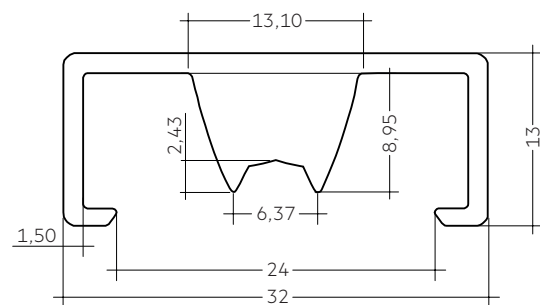

ACL LINEAR LENS 24mm DASY

ACL LENS 24mm

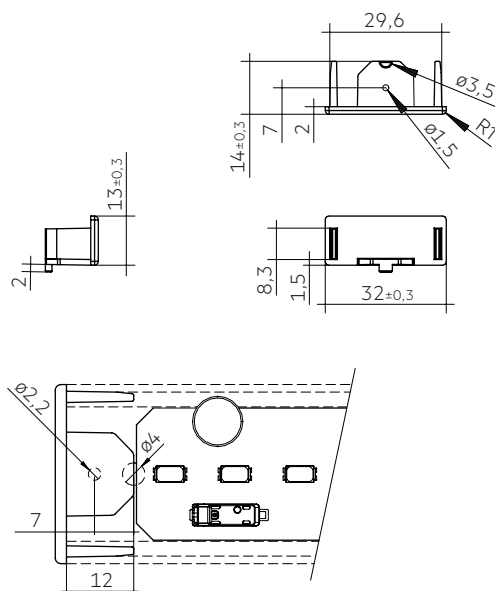

ACL Endcap LENS 24mm PSF

Ordering data

Type	Article number	Beam characteristic	Efficiency	Packaging carton	Weight per pc.
ACL LINEAR LENS 24x1200mm 60°	28001428	60°	97 %	21 pc(s).	0.196 kg
ACL LINEAR LENS 24x1200mm 90°	28001429	90°	97 %	21 pc(s).	0.165 kg
ACL LINEAR LENS 24x1500mm 60°	28000953	60°	97 %	21 pc(s).	0.261 kg
ACL LINEAR LENS 24x1500mm 90°	28000955	90°	97 %	21 pc(s).	0.221 kg
ACL LINEAR LENS 24x1200mm INTENSE	28002024	40°	95 %	18 pc(s).	0.261 kg
ACL LINEAR LENS 24x1500mm INTENSE	28002025	40°	95 %	18 pc(s).	0.326 kg
ACL LINEAR LENS 24x1800mm INTENSE	28002026	40°	95 %	18 pc(s).	0.392 kg
ACL LINEAR LENS 24x1200mm BATWING	28002027	batwing	95 %	18 pc(s).	0.275 kg
ACL LINEAR LENS 24x1500mm BATWING	28002028	batwing	95 %	18 pc(s).	0.344 kg
ACL LINEAR LENS 24x1800mm BATWING	28002029	batwing	95 %	18 pc(s).	0.412 kg
ACL LINEAR LENS 24x1200mm ASY	28002030	asymmetric	95 %	18 pc(s).	0.250 kg
ACL LINEAR LENS 24x1500mm ASY	28002031	asymmetric	95 %	18 pc(s).	0.312 kg
ACL LINEAR LENS 24x1800mm ASY	28002032	asymmetric	95 %	18 pc(s).	0.375 kg
ACL LINEAR LENS 24x1200mm DASY	28002033	double asymmetric	92 %	18 pc(s).	0.249 kg
ACL LINEAR LENS 24x1500mm DASY	28002034	double asymmetric	92 %	18 pc(s).	0.311 kg
ACL LINEAR LENS 24x1800mm DASY	28002035	double asymmetric	92 %	18 pc(s).	0.373 kg
ACL Endcap LENS 24mm PSF	28002669	–	–	3,600 pc(s).	0.003 kg

ACCESSORIES


CLIP 4.3mm

Product description

- Clip for fixation of LED modules with 4.3 mm holes
- Fast snap on mounting (sheet thickness 0.5 – 1.0 mm for PUSH-FIX and 1 – 2 mm for PUSH-FIX Long)
- For drilling hole 4 mm
- Clip made of Polycarbonat




ACL CLIP 4.3mm PUSH-FIX

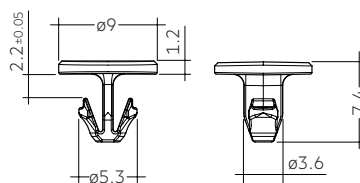

ACL CLIP 4.3mm PUSH-FIX



ACL CLIP 4.3mm PUSH-FIX Long

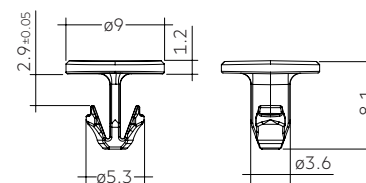

ACL CLIP 4.3mm PUSH-FIX Long

Ordering data

Type	Article number	Colour	Packaging bag ^①	Weight per pc.
ACL CLIP 4.3mm PUSH-FIX	28001036	White	500 pc(s).	0.001 kg
ACL CLIP 4.3mm PUSH-FIX Long	28002314	Transparent	500 pc(s).	0.001 kg


^① Minimum sales quantity 500 pcs.

ACCESSORIES

BRIDGE LLE24/40

Product description

- Enables the fixation of 24 mm wide Tridonic LED modules to fixtures made for 40 mm wide modules
- Ideal for extruded aluminium gear trays made for 40 mm modules with pre-alignment knobs
- Clip-on for LINEAR COVER and LINEAR LENS[®]
- For LLE 24 with 280 mm module minimum 2 bridges required
- For LLE 24 with 560 mm module minimum 3 bridges required
- Fixation via M3 or M4 countersunk screw, max. tightening torque 0.5 Nm
- BRIDGE made of white polycarbonate

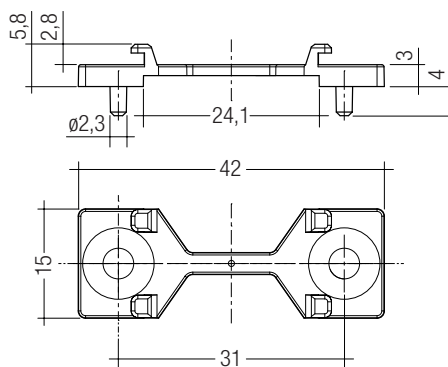

Ordering data

Type	Article number	Colour	Packaging carton ^①	Weight per pc.
ACL BRIDGE LLE24/40 SCREW-FIX	28001205	White	600 Stk.	0.001 kg

^① Minimum sales quantity 600 pcs.

[®] Beam characteristics will change due to the elevated fixation (see photometric files for details).

1. Standards

IEC 62031
IEC 62471
IEC 61000-4-2
IEC 62778
IEC 61547

1.1 Photometric code

Key for photometric code, e. g. 830 / 349

1 st digit	2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit
Code	Colour temperature in Kelvin x 100	MacAdam initial	MacAdam after 25% of the lifetime (max.6000h)	Luminous flux after 25% of the lifetime (max.6000h)
7 70 – 79				Code Luminous flux
8 80 – 89				7 ≥ 70 %
9 ≥90				8 ≥ 80 % 9 ≥ 90 %

1.2 Risk group

LLE 24x1120mm 2600lm ADV6 + LLE 24x1400mm 3250lm ADV6

Forward current	Risk group (IEC 62471)
≤ 562 mA	RG0
> 562 – 800 mA (Imax)	RG1

LLE 24x1120mm 4800lm ADV6 + LLE 24x1400mm 6000lm ADV6

Forward current	Risk group (IEC 62471)
≤ 280 mA	RG0
> 280 – 800 mA (Imax)	RG1

LLE 24x1120mm 8000lm ADV6 + LLE 24x1400mm 10000lm ADV6

Forward current	Risk group (IEC 62471)
≤ 208 mA	RG0
> 208 – 700 mA (Imax)	RG1

1.3 Energy classification

Type	Colour temperature	Forward current	Energy classification	Energy consumption
LLE 24x1120mm 2600lm 830 HV ADV6	3,000 K	275 mA	C	13 kWh / 1,000 h
LLE 24x1120mm 2600lm 835 HV ADV6	3,500 K	275 mA	B	13 kWh / 1,000 h
LLE 24x1120mm 2600lm 840 HV ADV6	4,000 K	275 mA	B	13 kWh / 1,000 h
LLE 24x1400mm 3250lm 830 HV ADV6	3,000 K	275 mA	C	16 kWh / 1,000 h
LLE 24x1400mm 3250lm 835 HV ADV6	3,500 K	275 mA	C	16 kWh / 1,000 h
LLE 24x1400mm 3250lm 840 HV ADV6	4,000 K	275 mA	B	16 kWh / 1,000 h
LLE 24x1120mm 4800lm 830 HV ADV6	3,000 K	275 mA	C	25 kWh / 1,000 h
LLE 24x1120mm 4800lm 835 HV ADV6	3,500 K	275 mA	C	25 kWh / 1,000 h
LLE 24x1120mm 4800lm 840 HV ADV6	4,000 K	275 mA	B	25 kWh / 1,000 h
LLE 24x1400mm 6000lm 830 HV ADV6	3,000 K	275 mA	C	31 kWh / 1,000 h
LLE 24x1400mm 6000lm 835 HV ADV6	3,500 K	275 mA	C	31 kWh / 1,000 h
LLE 24x1400mm 6000lm 840 HV ADV6	4,000 K	275 mA	B	31 kWh / 1,000 h
LLE 24x1120mm 8000lm 830 HV ADV6	3,000 K	300 mA	C	40 kWh / 1,000 h
LLE 24x1120mm 8000lm 840 HV ADV6	4,000 K	300 mA	B	40 kWh / 1,000 h
LLE 24x1400mm 10000lm 830 HV ADV6	3,000 K	300 mA	C	50 kWh / 1,000 h
LLE 24x1400mm 10000lm 840 HV ADV6	4,000 K	300 mA	B	50 kWh / 1,000 h

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base <https://eprel.ec.europa.eu/>

2. Thermal details

2.1 tc point, ambient temperature and lifetime

The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For LLE a tp temperature of 50 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-40 ... +80 °C
---------------------	----------------

Operation only in non condensing environment.

Humidity during processing of the module should be between 30 to 70 %.

2.3 Heat sink values

LLE 24x1120mm 2600lm ADV6

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	275 mA		self cooling
25 °C	50 °C	700 mA	1.24 K/W	539 cm²
35 °C	50 °C	275 mA		self cooling
35 °C	50 °C	700 mA	0.67 K/W	994 cm²
40 °C	50 °C	275 mA	1.66 K/W	401 cm²
40 °C	50 °C	700 mA	0.39 K/W	1721 cm²
45 °C	50 °C	275 mA	0.74 K/W	898 cm²
45 °C	50 °C	700 mA	0.10 K/W	6,385 cm²

LLE 24x1120mm 4800lm ADV6

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	275 mA	2.12 K/W	314 cm²
25 °C	50 °C	700 mA	0.53 K/W	1261 cm²
35 °C	50 °C	275 mA	1.20 K/W	554 cm²
35 °C	50 °C	700 mA	0.25 K/W	2711 cm²
40 °C	50 °C	275 mA	0.74 K/W	898 cm²
40 °C	50 °C	700 mA	0.10 K/W	6,385 cm²
45 °C	50 °C	275 mA	0.28 K/W	2,366 cm²
45 °C	50 °C	700 mA	3.43 K/W	194 cm²

LLE 24x1120mm 8000lm ADV6

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	300 mA	1.20 K/W	556 cm²
25 °C	50 °C	600 mA	0.25 K/W	2,718 cm²
35 °C	50 °C	300 mA	0.65 K/W	1,029 cm²
35 °C	50 °C	600 mA	0.08 K/W	8,804 cm²
40 °C	50 °C	300 mA	0.37 K/W	1,790 cm²
45 °C	50 °C	300 mA	0.10 K/W	6,876 cm²

LLE 24x1400mm 3250lm ADV6

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	275 mA		self cooling
25 °C	50 °C	700 mA	0.99 K/W	674 cm²
35 °C	50 °C	275 mA		self cooling
35 °C	50 °C	700 mA	0.54 K/W	1,243 cm²
40 °C	50 °C	275 mA	1.33 K/W	501 cm²
40 °C	50 °C	700 mA	0.31 K/W	2,151 cm²
45 °C	50 °C	275 mA	0.59 K/W	1,123 cm²
45 °C	50 °C	700 mA	0.08 K/W	7,981 cm²

LLE 24x1400mm 6000lm ADV6

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	275 mA	1.70 K/W	393 cm²
25 °C	50 °C	700 mA	0.42 K/W	1,576 cm²
35 °C	50 °C	275 mA	0.96 K/W	693 cm²
35 °C	50 °C	700 mA	0.20 K/W	3,389 cm²
40 °C	50 °C	275 mA	0.59 K/W	1,123 cm²
40 °C	50 °C	700 mA	0.08 K/W	7,981 cm²
45 °C	50 °C	275 mA	0.23 K/W	2,958 cm²

LLE 24x1400mm 10000lm ADV6

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	300 mA	0.96 K/W	695 cm²
25 °C	50 °C	600 mA	0.20 K/W	3,398 cm²
35 °C	50 °C	300 mA	0.52 K/W	1,286 cm²
35 °C	50 °C	600 mA	0.06 K/W	11,005 cm²
40 °C	50 °C	300 mA	0.30 K/W	2,237 cm²
45 °C	50 °C	300 mA	0.08 K/W	8,594 cm²

Notes

The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation. Depending on the heat sink a heat conducting paste or heat conducting film might be necessary to keep the specified tp temperature.

For applications with a small distance between LED module and lens, screw mounting is recommended to ensure a reliable thermal connection between LED module and cooling surface.

3. Installation / wiring

3.1 Electrical supply/choice of LED driver

LLE modules from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED driver which complies with the relevant standards. The use of LED driver from Tridonic in combination with LLE modules guarantees the necessary protection for safe and reliable operation.

If a LED driver other than Tridonic is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection



LLE modules must be supplied by a constant current LED driver. Operation with a constant voltage LED driver will lead to an irreversible damage of the module.

Wrong polarity can damage the LLE.

The LLE module is designed for serial wiring.

LLE can be operated either from SELV LED drivers or from LED drivers with LV output voltage.




LLE are basic insulated up to 350 / 440 V (if mounted with M4 screws with head diameter 7 mm) against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the LED driver (also against earth) is above 350 / 440 V, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction. At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.

3.2 Wiring




Wiring example

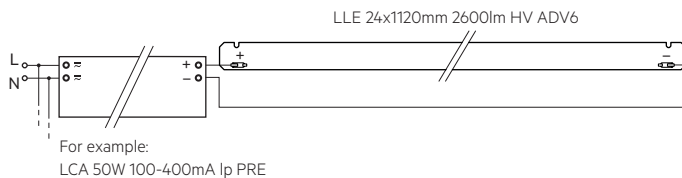

3.3 Wiring type and cross section

For wiring use stranded wire with ferrules or solid wire from 0.2 to 0.75 mm². For the push-wire connection you have to strip the insulation (8–9 mm).



To remove the wires use a suitable tool (e.g. Microcon release pin) or through twist and pull.

3.4 Mounting instruction



None of the components of the LLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.

The LED modules are mounted onto a heat sink with min. 12 screws per module or ACL CLIP 4.3mm.



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate. Avoid corrosive atmosphere during usage and storage.

3.5 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

4. Lifetime

4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value.
L70 means that the LED module will give 70 % of its initial luminous flux.
This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.

The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value.

In addition the percentage of failed modules (fatal failure) is characterized by the C value.

4.2 Lumen maintenance for LLE 24mm HV ADV6

Forward current	tp tempera- ture	L90 / B10	L90 / B50	L80 / B10	L80 / B50	L70 / B10	L70 / B50
100 mA	40 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	50 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	60 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	70 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	80 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	85 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
275 mA	40 °C	61k h	>72k h	>72k h	>72k h	>72k h	>72k h
	50 °C	53k h	71k h	>72k h	>72k h	>72k h	>72k h
	60 °C	39k h	51k h	>72k h	>72k h	>72k h	>72k h
	70 °C	37k h	48k h	>72k h	>72k h	>72k h	>72k h
	80 °C	35k h	45k h	>72k h	>72k h	>72k h	>72k h
	85 °C	34k h	44k h	70k h	>72k h	>72k h	>72k h
600 mA	40 °C	54k h	>72k h	>72k h	>72k h	>72k h	>72k h
	50 °C	47k h	64k h	>72k h	>72k h	>72k h	>72k h
	60 °C	41k h	55k h	>72k h	>72k h	>72k h	>72k h
	70 °C	36k h	48k h	>72k h	>72k h	>72k h	>72k h
	80 °C	31k h	42k h	>72k h	>72k h	>72k h	>72k h
	85 °C	29k h	40k h	>72k h	>72k h	>72k h	>72k h
700 mA	40 °C	48k h	62k h	>72k h	>72k h	>72k h	>72k h
	50 °C	45k h	59k h	>72k h	>72k h	>72k h	>72k h
	60 °C	42k h	55k h	>72k h	>72k h	>72k h	>72k h
	70 °C	40k h	52k h	>72k h	>72k h	>72k h	>72k h
	80 °C	37k h	49k h	>72k h	>72k h	>72k h	>72k h
	85 °C	36k h	47k h	>72k h	>72k h	>72k h	>72k h

LOC10 >72k h. At tp rated, based on 10 swichting cycles per day.

4.3 Switching capability

100,000 cycles

Tridonic test according to IEC 62717 Cl 10.3.3

30 s on / 30 s off at Imax

5. Electrical values

5.1 Declaration of electrical parameters

I_{rated} ... Nominal operating current the module is designed for.


I_{max} ... Max. permissible continuous operating current incl. The tolerances of the LED driver.

Max. permissible LF current ripple ... Max. output current of the LED driver incl. Tolerances and LF current ripple must not exceed this value.


Max. permissible peak current ... The max. output peak current of the LED driver must not exceed this value.

5.2 Typ. forward voltage vs. forward current


LLE 24x1120mm 2600lm 8xx HV ADV6

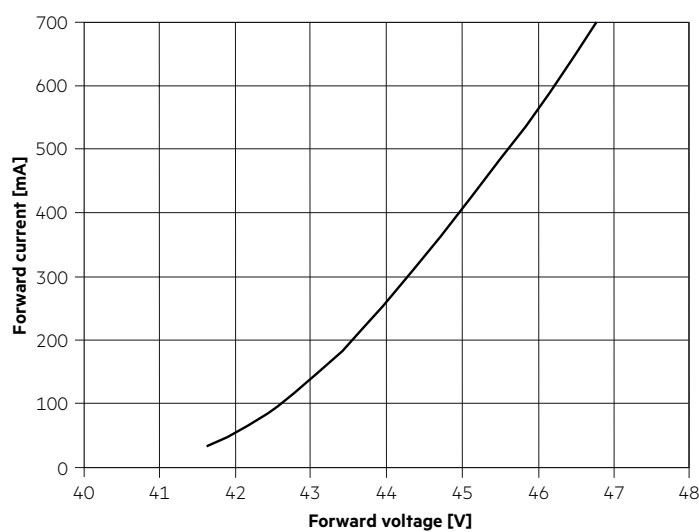


LLE 24x1400mm 3250lm 8xx HV ADV6

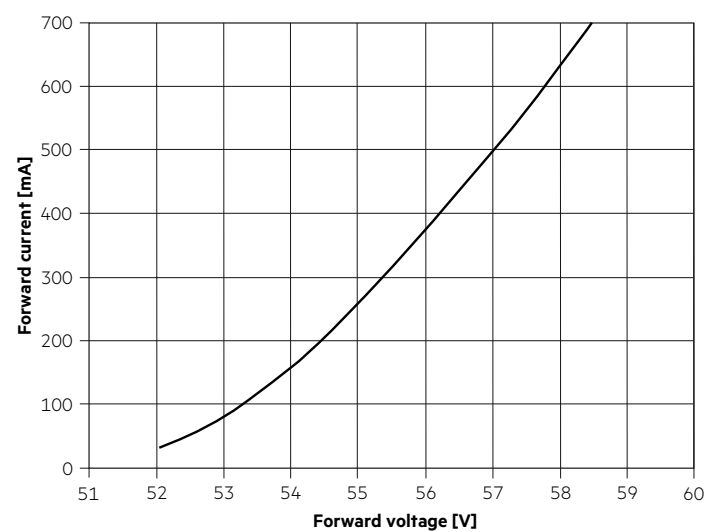

LLE 24x1120mm 4800lm 8xx HV ADV6

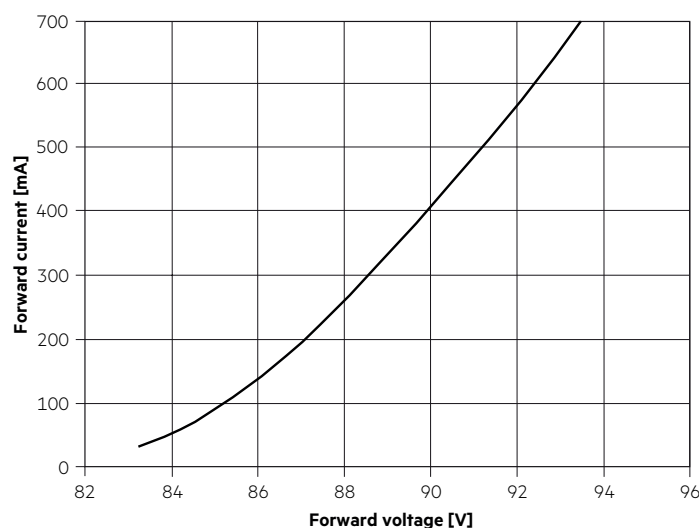


LLE 24x1400mm 6000lm 8xx HV ADV6

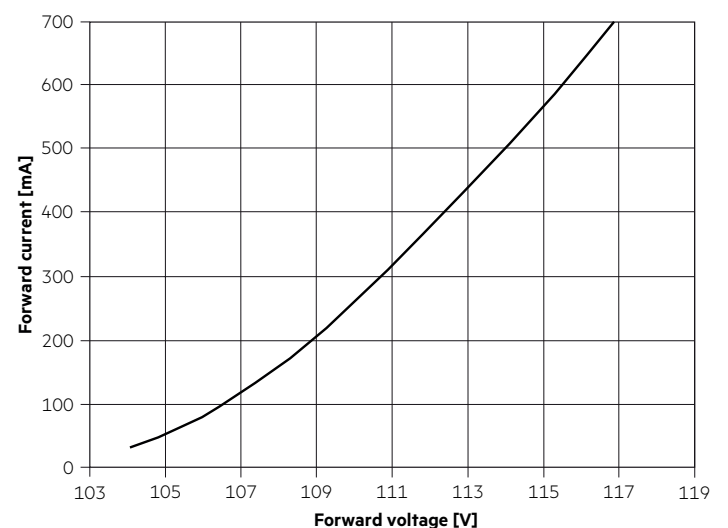


The diagrams are based on statistic values.
The real values can be different.


LLE 24x1120mm 8000lm 8xx HV ADV6

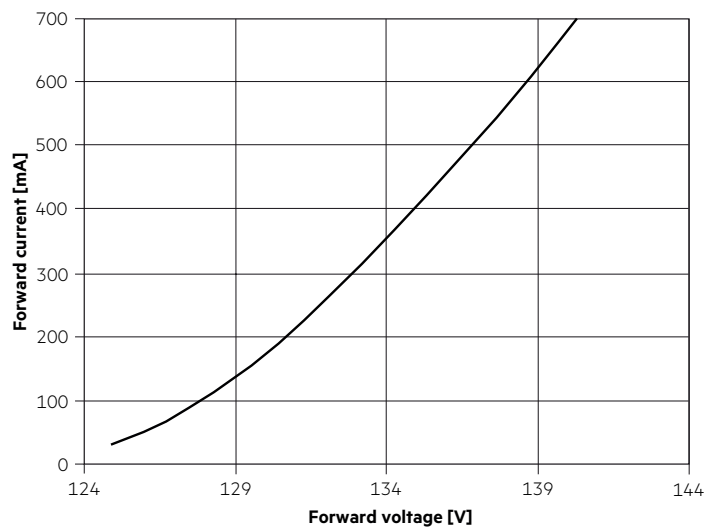

LLE 24x1400mm 10000lm 8xx HV ADV6

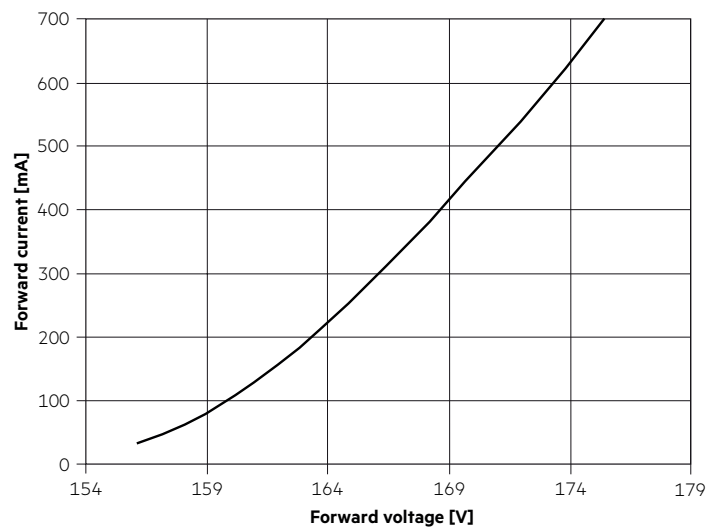

5.3 Forward voltage vs. t_c temperature

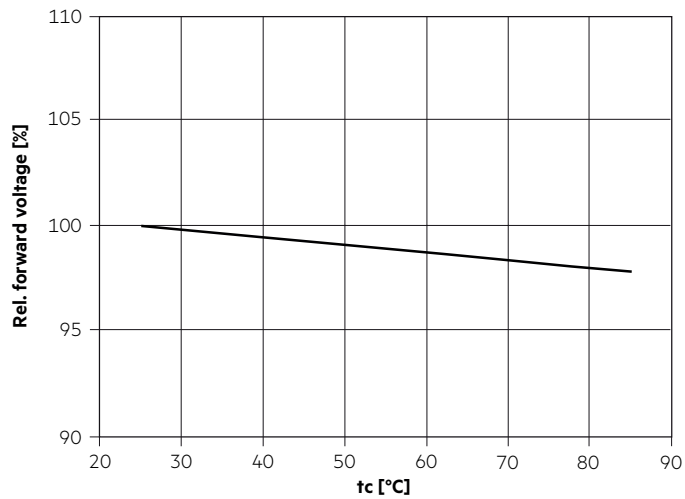

The diagrams are based on statistic values.
The real values can be different.



6. Photometric characteristics

6.1 Coordinates and tolerances according to CIE 1931

The specified colour coordinates are integral measured by current impulse of 195 mA and a duration of 100 ms.
The ambient temperature of the measurement is $t_a = 25^\circ\text{C}$.
The measurement tolerance of the colour coordinates are ± 0.01 .



3,000 K

	x0	y0
Centre	0.4338	0.4030

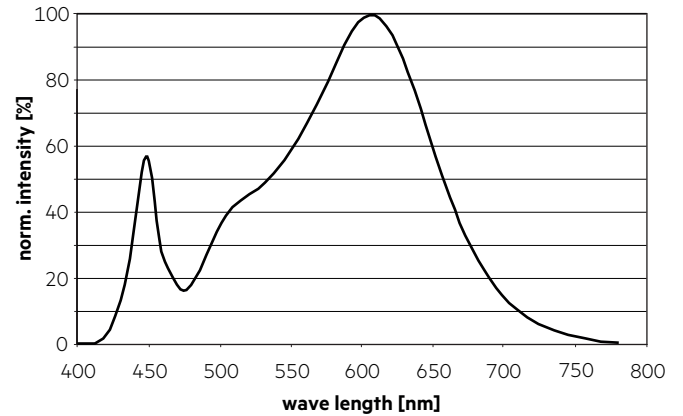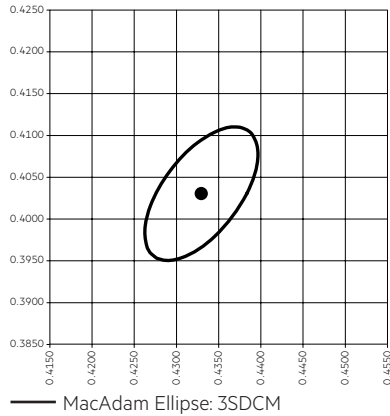



3,500 K

	x0	y0
Centre	0.4073	0.3917

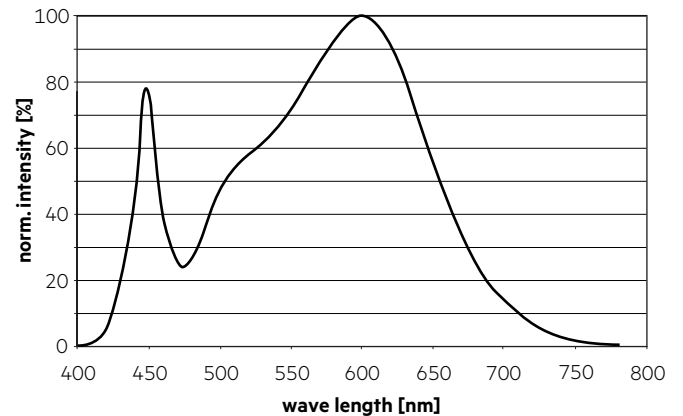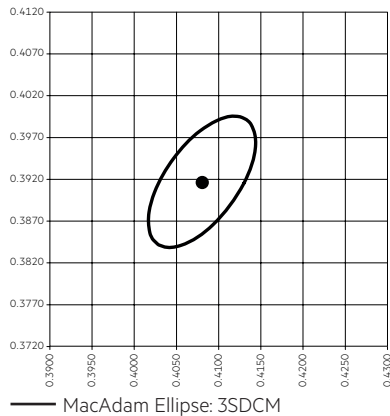


4,000 K

	x0	y0
Center	0.3818	0.3797

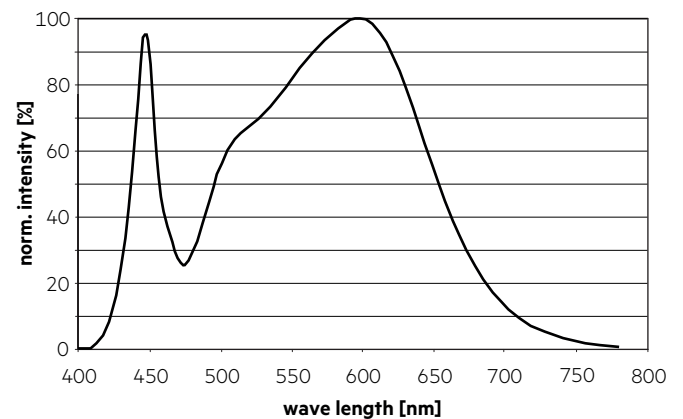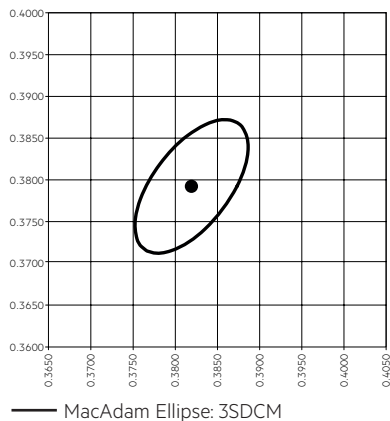

6.2 Light distribution


The optical design of the LLE product line ensures optimum homogeneity for the light distribution.

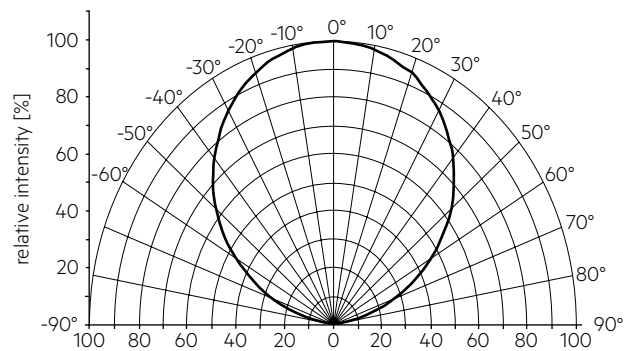


The colour temperature is measured integral over the complete module. The single LED light points can have deviations in the colour coordinates within MacAdam 5.

To ensure an ideal mixture of colours and a homogeneous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 4 cm) should be used.

6.3 Relative luminous flux vs. tc temperature

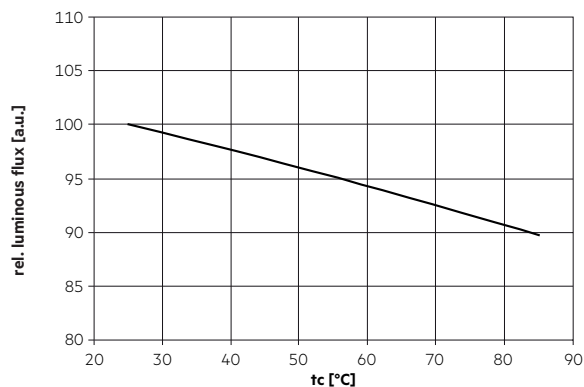

6.4 Relative luminous flux vs. operating current

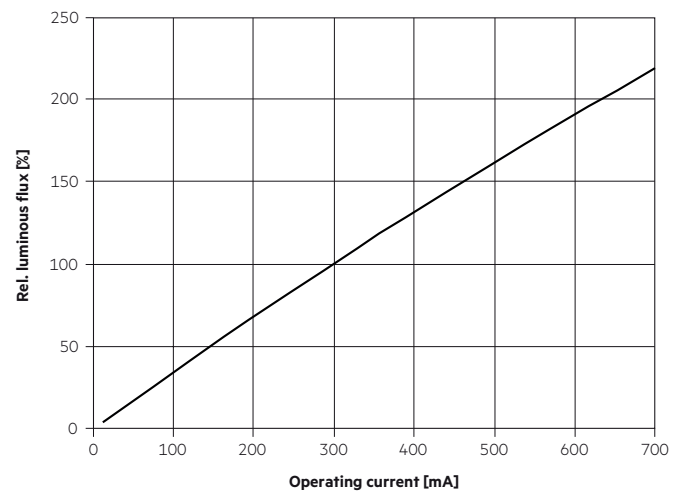

The diagrams are based on statistic values.
The real values can be different.

7. Miscellaneous

7.1 Additional information

Additional technical information at www.tridonic.com → Technical Data

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base <https://eprel.ec.europa.eu/>

Guarantee conditions at www.tridonic.com → Services

Lifetime declarations are informative and represent no warranty claim.